

**Basic features**

<b>Approval/Conformity</b>	CE UKCA cULus WEEE
<b>Basic standard</b>	IEC 60947-5-2 IEC 60947-5-7

**Display/Operation**

<b>Function indicator</b>	Adjustment indicator
<b>Power indicator</b>	no

**Electrical connection**

<b>Cable diameter D</b>	4.60 mm
<b>Cable length L</b>	0.2 m
<b>Connection</b>	M12x1-Male, 4-pin, A-coded
<b>Connection type</b>	Cable with connector, 0.20 m, PUR
<b>Polarity reversal protected</b>	yes
<b>Protection against device mix-ups</b>	yes
<b>Short-circuit protection</b>	yes

**Electrical data**

<b>Limit frequency -3 dB</b>	1000 Hz
<b>Load resistance RL max.</b>	500 Ohm
<b>No-load current Io max. at Ue</b>	15 mA
<b>Operating voltage Ub</b>	16...30 VDC
<b>Protection class</b>	II
<b>Rated insulation voltage Ui</b>	250 V AC
<b>Rated operating voltage Ue DC</b>	24 V
<b>Ripple max. (% of Ue)</b>	15 %
<b>Slope I</b>	6.06 mA/mm

**Environmental conditions**

<b>Ambient temperature</b>	-40...80 °C
<b>Contamination scale</b>	3
<b>EN 60068-2-27, Shock</b>	Half-sinus, 30 gn, 11 ms
<b>EN 60068-2-6, Vibration</b>	55 Hz, amplitude 1 mm, 3x30 min
<b>IP rating</b>	IP68

**Functional safety**

<b>MTTF (40 °C)</b>	533 a
---------------------	-------

**Interface**

<b>Analog output</b>	Analog, current 0...20 mA
<b>Output characteristic</b>	falling on approach
<b>Output current at SI max.</b>	20 mA
<b>Output current at SI min.</b>	0 mA
<b>Output current at Se</b>	10 mA

Inductive Sensors  
**BAW M12MN-IAC35C-BP00,2-GS04**  
**Order Code: BAW004F**



**Material**

Housing material	Brass, Nickel-free coated
Material jacket	PUR
Material sensing surface	PBT

**Range/Distance**

Linearity range SI	0.2...3.5 mm
Measuring range	0.2...3.5 mm
Non-linearity max.	±53 µm
Repeat accuracy per BWN	±7 µm
Temperature drift max. from end value	±5.0 %

**Mechanical data**

Dimension	Ø 12 x 63 mm
Installation	for flush mounting
Size	M12x1
Tightening torque	10 Nm

**Remarks**

Values referenced to axial approach of St 37 target. For other materials correction factors are applied.

We recommend to connect the teach line to the negative lead (L-) when not in use.

The working range can be taught using the Teach line or the BAE PD-AW-008-S04 programmer (order code BAE00MP).

At temperatures below -25°C the cable must be fixed in place.

Scattering (e.g. due to manufacturing tolerances) is described by the tolerance T at Se. This can be approximated using the formula:  $T = (sl_{max} + sl_{min}) / 20 = \pm xx \text{ mm}$ .

UL-MARKINGS: - For use in NFPA 79 Applications only - Adapters providing field wiring means are available from the manufacturer. Refer to manufacturers information.


For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.


**Connector Drawings**



**Wiring Diagrams**



Technical Drawings

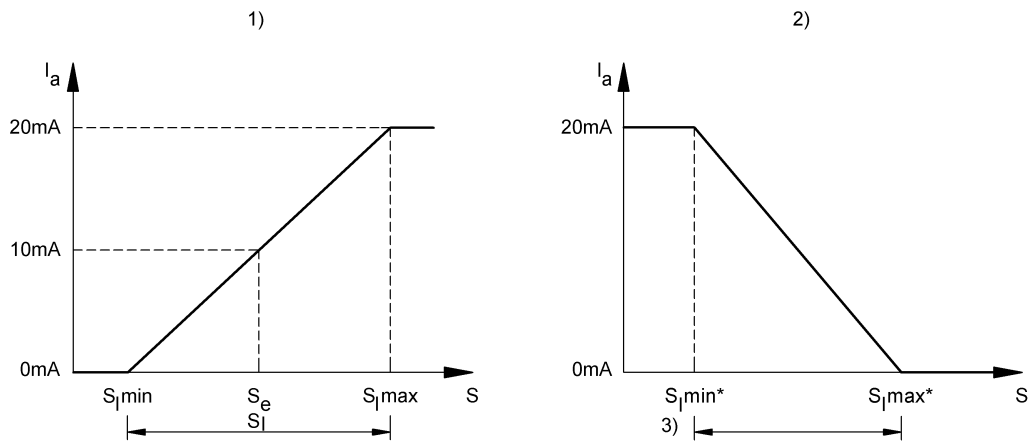

- 1) Standard characteristic curve
- 2) Reduced measuring range
- 3) Minimum width  $SI/3$