


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT copyright.d8te- ALL RIGHTS RESERVED.


REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
1		PROPOSED	10JAN2018	CD MM
2		UPDATED	31JAN2018	CD EH

- 1. MATERIAL:  
-POLYCARBONATE COLOR: SEE TABLE
- 2. MUST COMPLY WITH DIRECTIVE 2002/95/EC (ROHS)
- 3. THIS PRODUCT HAS NOT COMPLETED VALIDATION TESTING
- 4. MODULE BASE TE P/N: 2213837-1

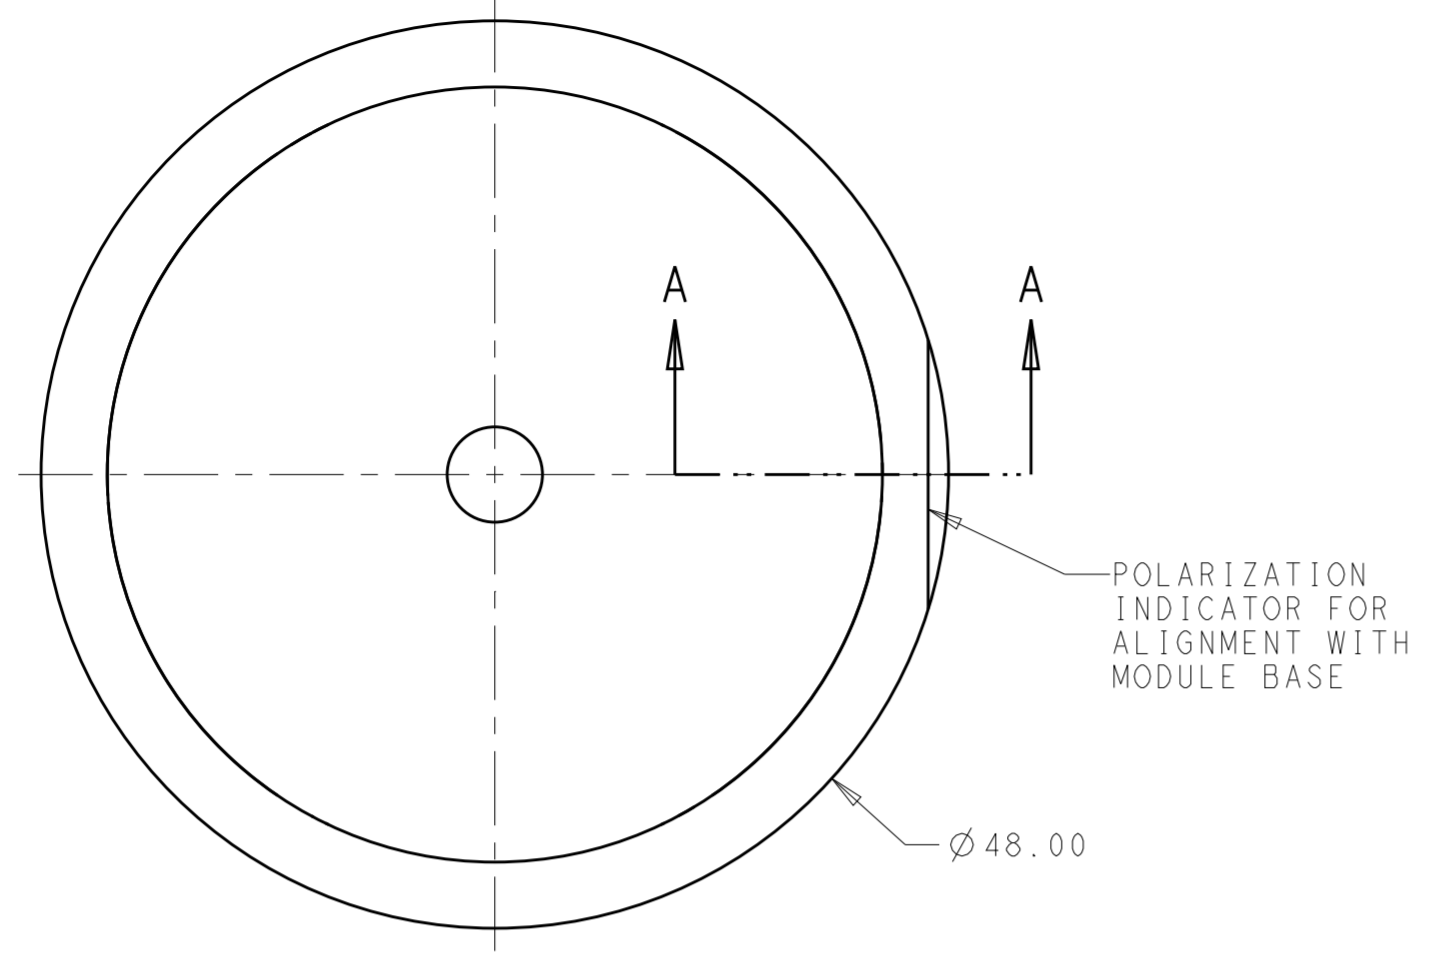

POLARIZATION INDICATOR FOR ALIGNMENT WITH MODULE BASE

Ø48.00

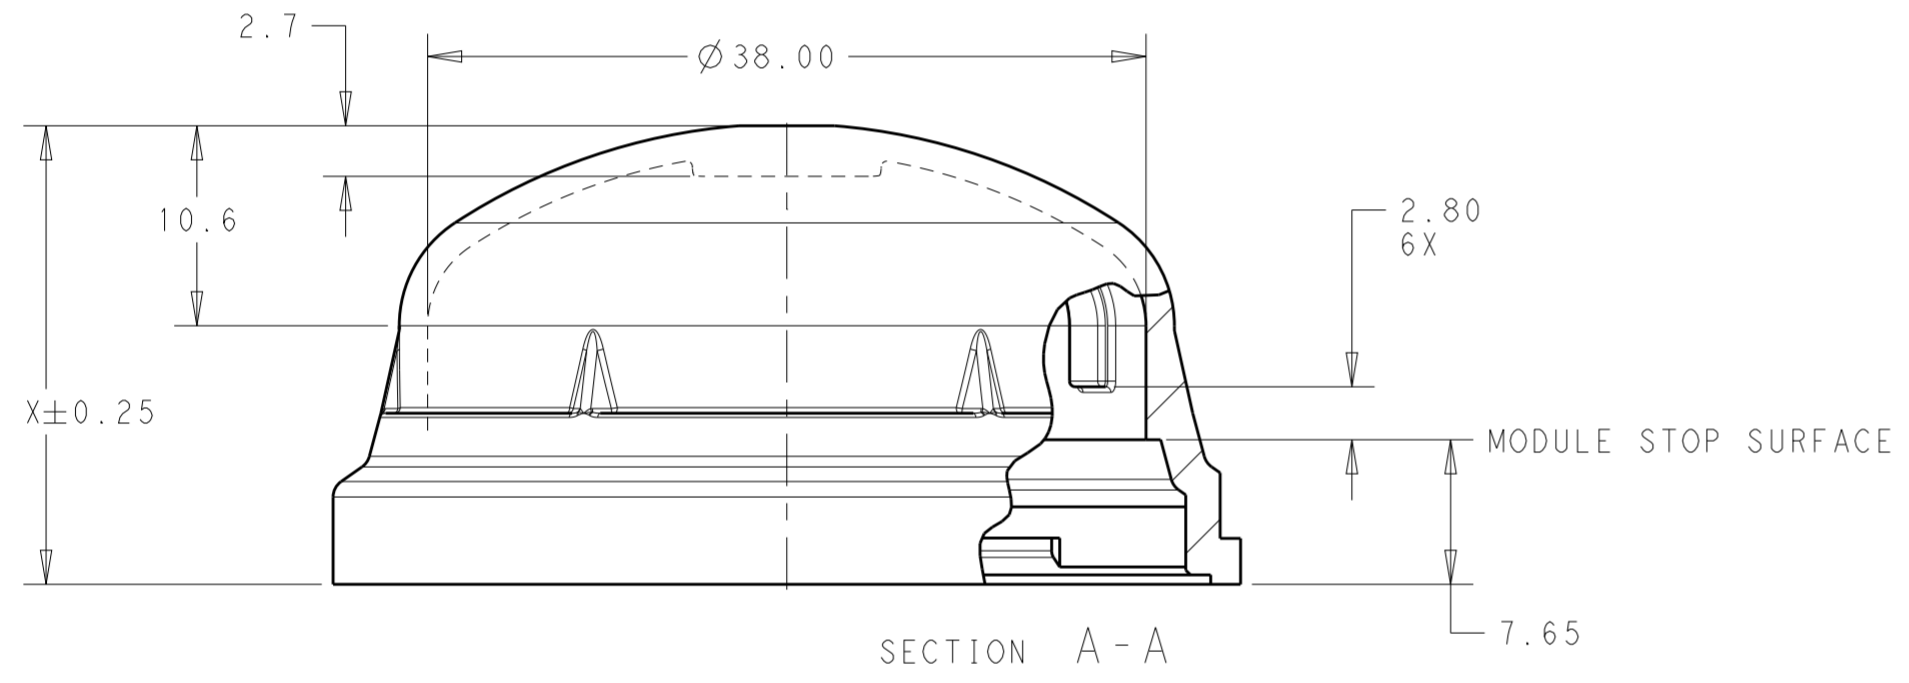


SECTION A-A

DIM X±0.25



MODULE STOP SURFACE

POLARIZATION FEATURES


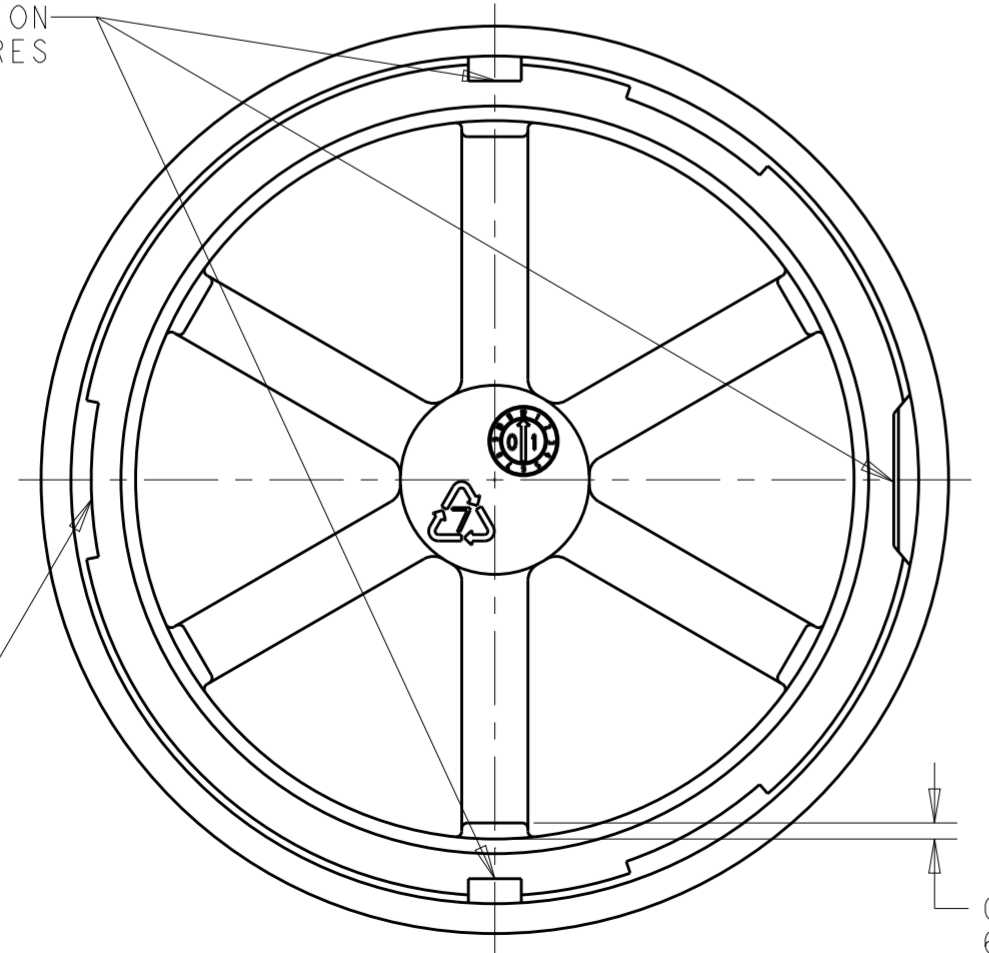


LATCH 3X

0.9 6X

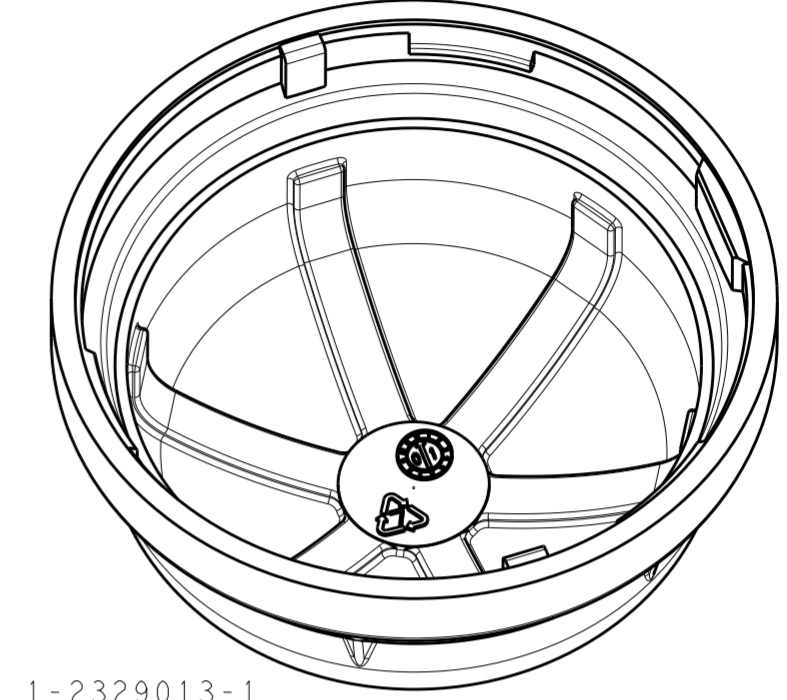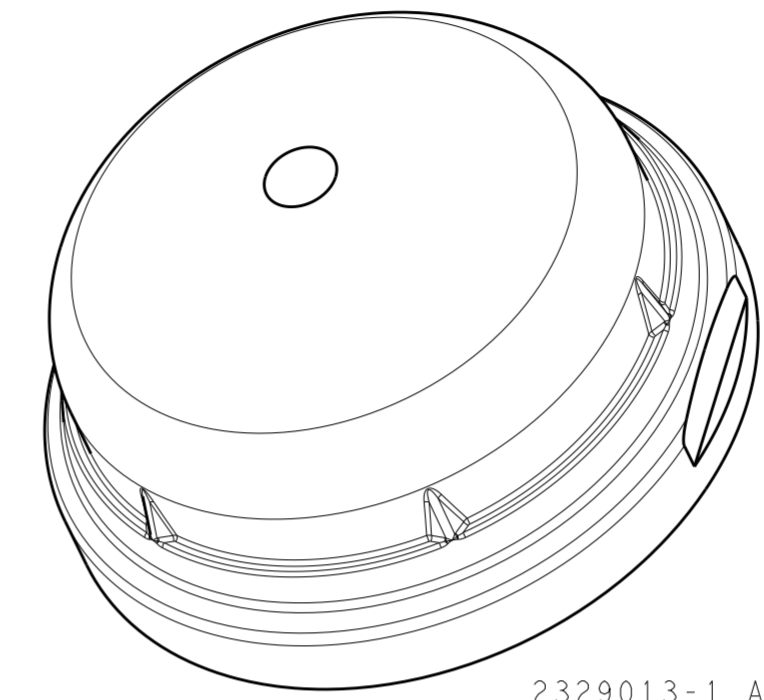

2329013-1 AND 1-2329013-1 SHOWN SCALE 2:1

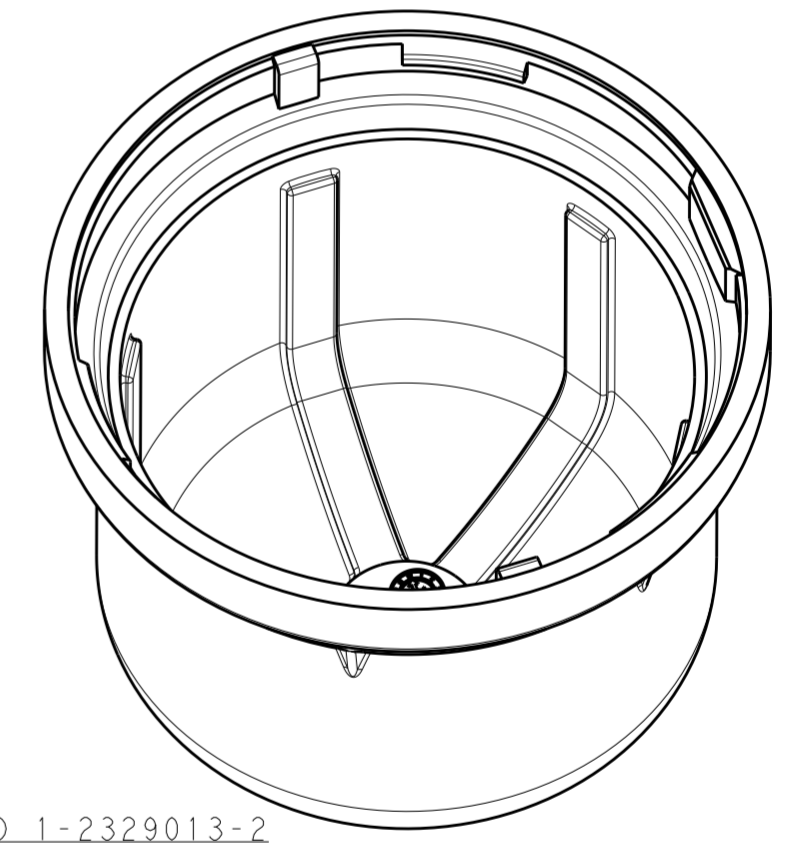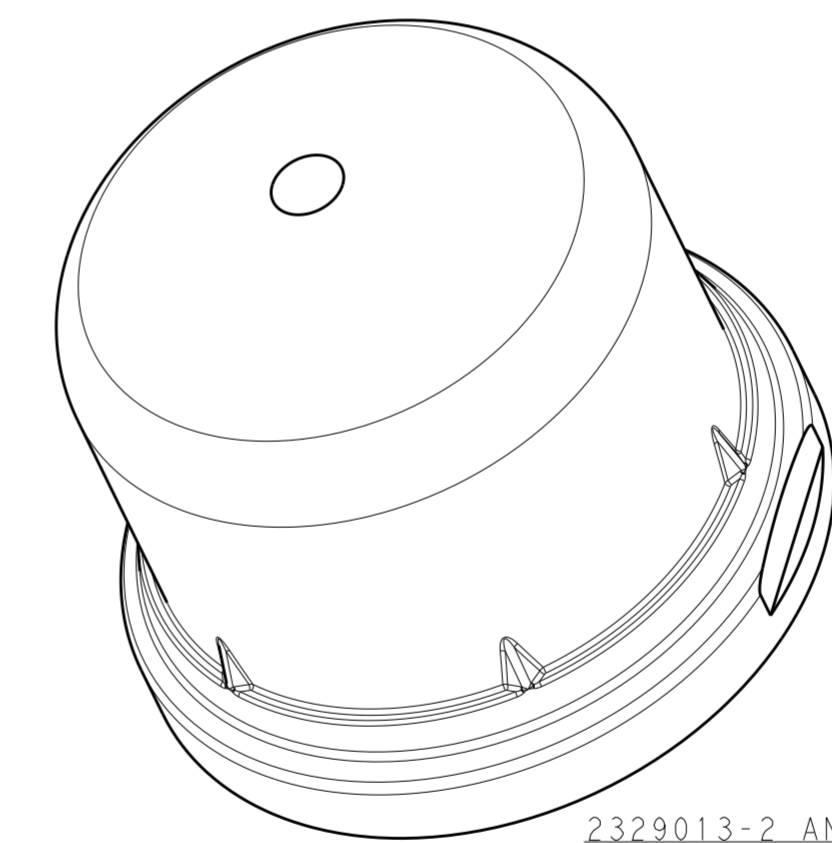

2329013-2 AND 1-2329013-2 SHOWN SCALE 2:1

APPROX. LIGHT TRANSMISSION	COLOR	DIM X	PART NO.
78	TRANSPARENT CLEAR	39.25	1-2329013-2
78	TRANSPARENT CLEAR	24.25	1-2329013-1
24	TRANSPARENT SMOKE	39.25	2329013-2
24	TRANSPARENT SMOKE	24.25	2329013-1

**NEW PRODUCT  
PRELIMINARY  
IN DEVELOPMENT**

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ±0.2 2 PLC ±0.10 3 PLC ± 4 PLC ± ANGLES ±1° FINISH -	DWN C DAILY 10JAN2018 CHK MOSTOLTER 10JAN2018 APVD -	NAME - PRODUCT SPEC 108-133073 APPLICATION SPEC 114-133074 WEIGHT -	 TE Connectivity DOME, LUMAWISE ENDURANCE S, 40mm
MATERIAL SEE TABLE			SIZE A200779 CAGE CODE C-2329013 DRAWING NO. RESTRICTED TO	
		CUSTOMER DRAWING	SCALE 5:2 SHEET 1 OF 1 REV 2	