


Aug.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

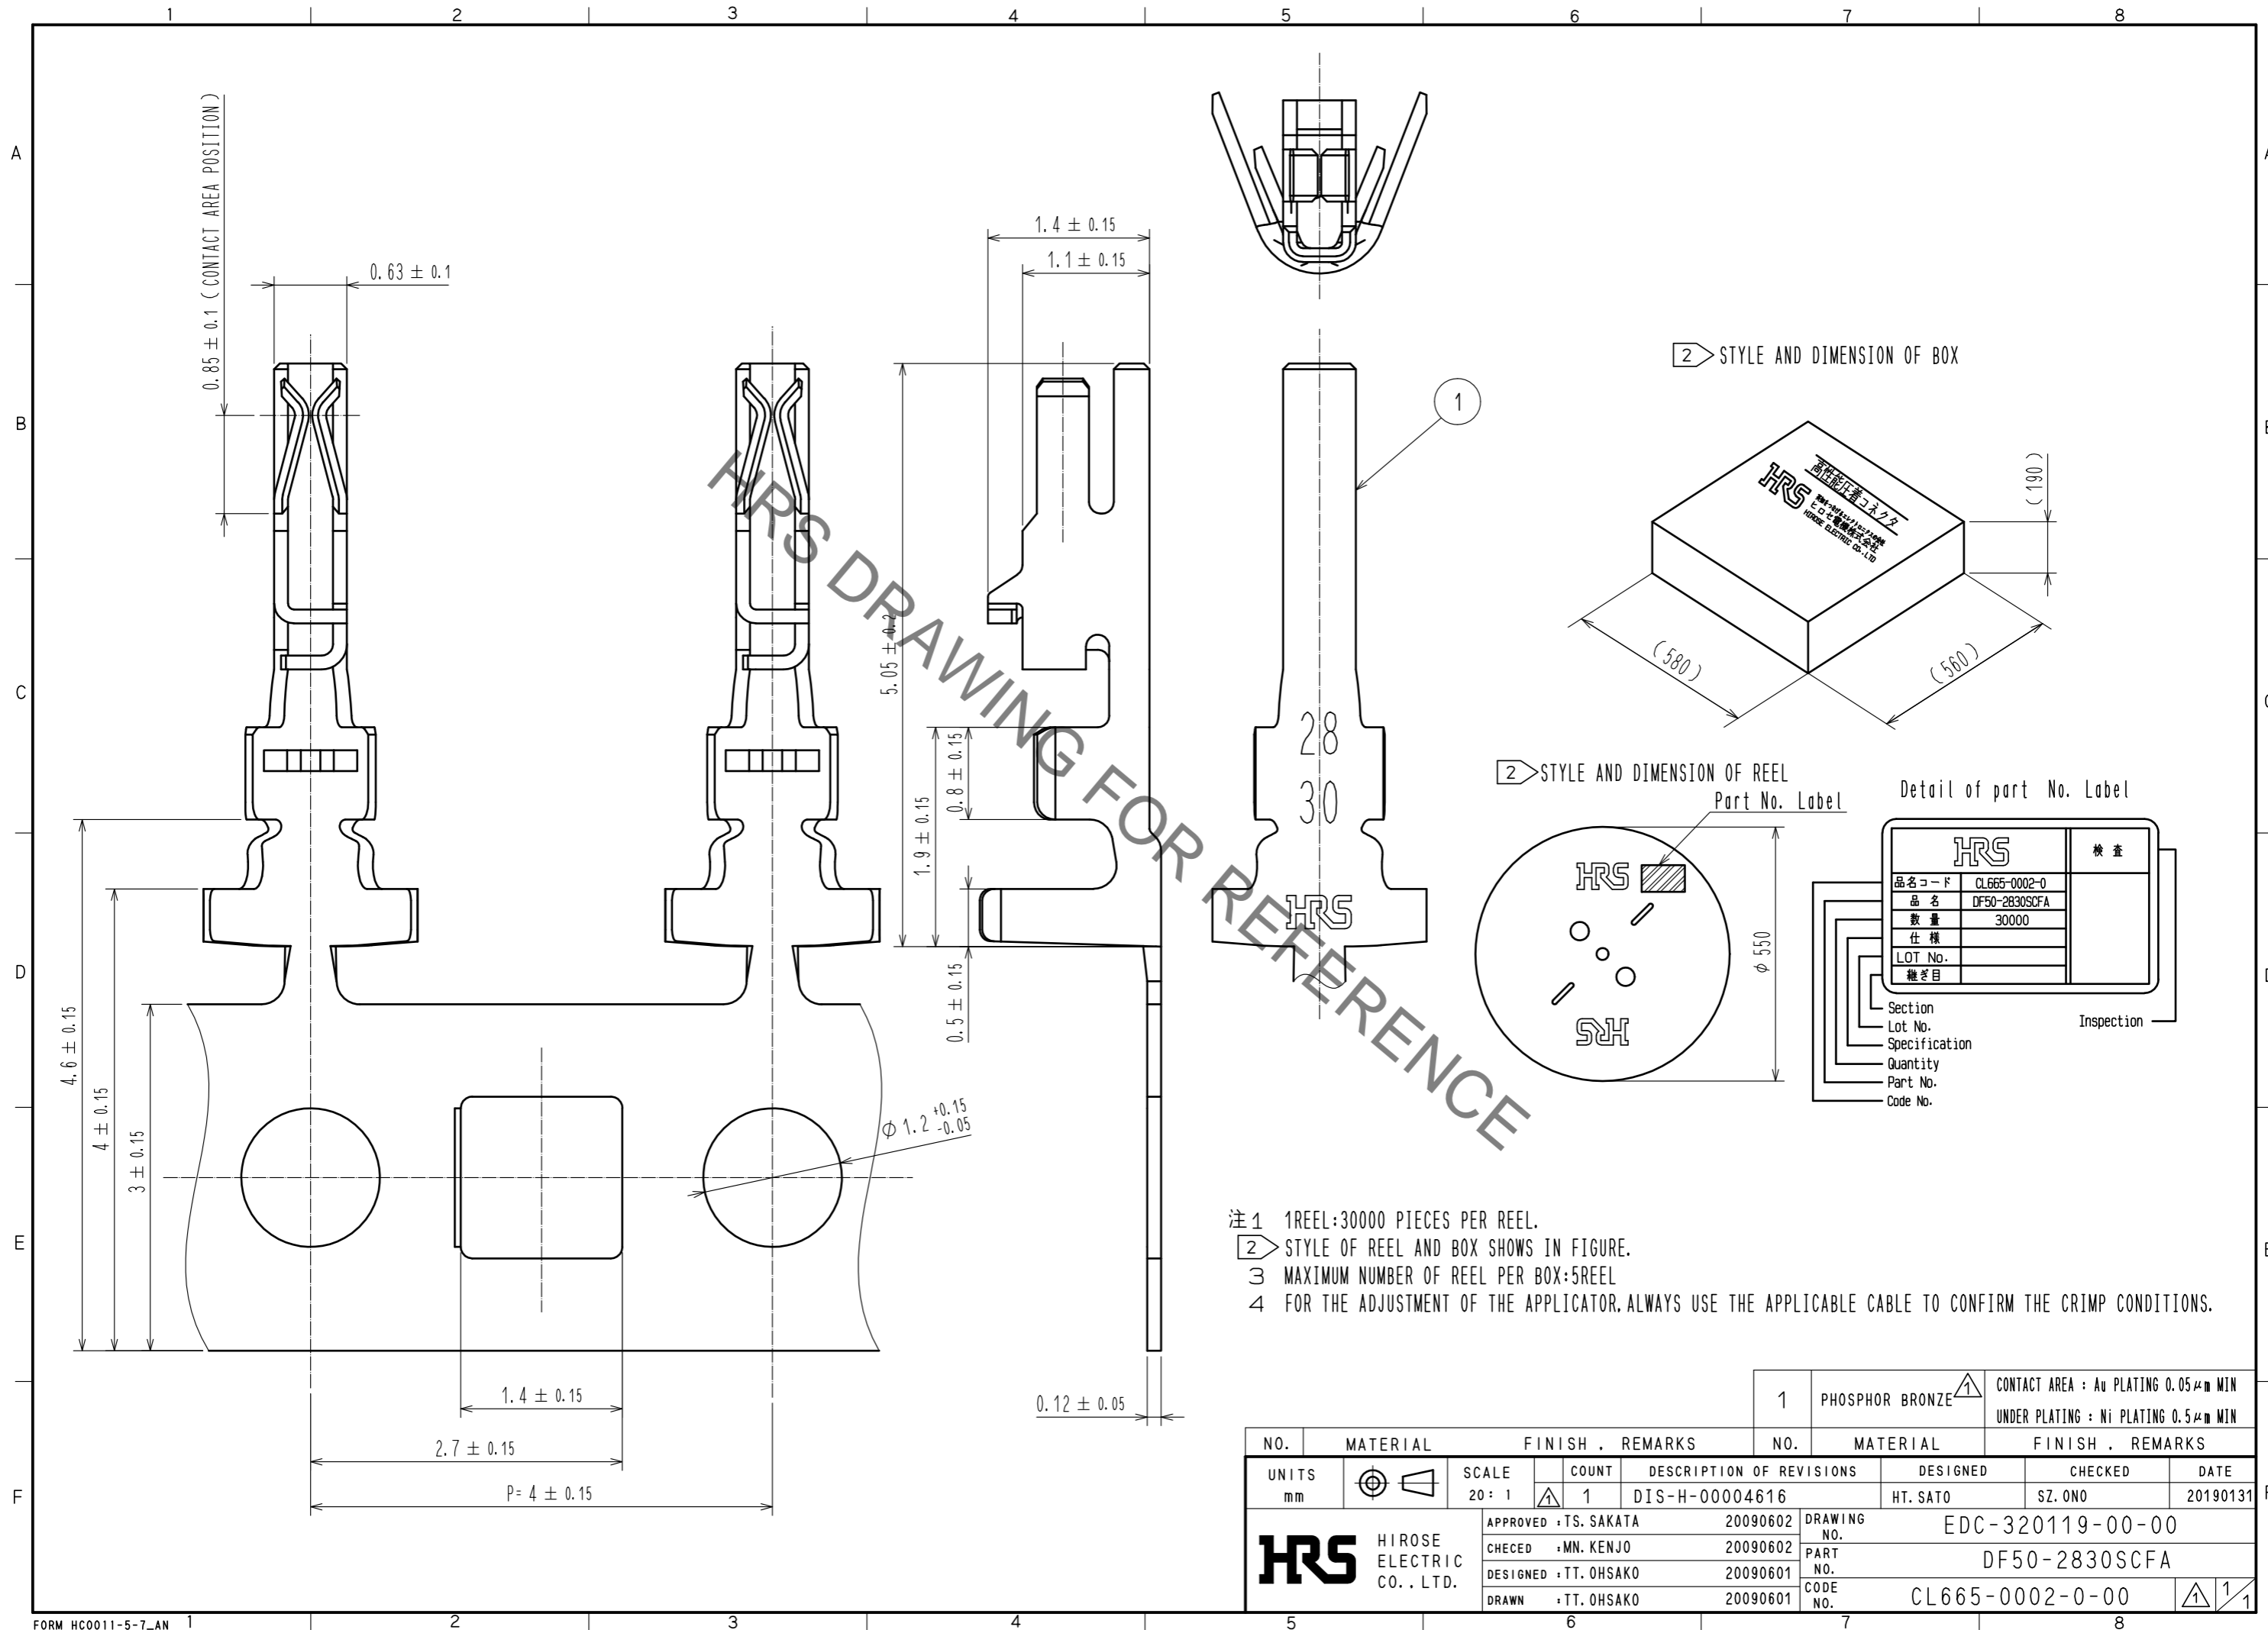

2 STYLE AND DIMENSION OF BOX

2 STYLE AND DIMENSION OF REEL

Detail of part No. Label

HRS		検査
品名コード	CL665-0002-0	
品名	DF50-2830SCFA	
数量	30000	
仕様		
LOT No.		
継ぎ目		

- 注1 1REEL:30000 PIECES PER REEL.
 2 STYLE OF REEL AND BOX SHOWS IN FIGURE.
 3 MAXIMUM NUMBER OF REEL PER BOX:5REEL
 4 FOR THE ADJUSTMENT OF THE APPLICATOR, ALWAYS USE THE APPLICABLE CABLE TO CONFIRM THE CRIMP CONDITIONS.

NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS	
1	PHOSPHOR BRONZE	CONTACT AREA : Au PLATING 0.05μm MIN UNDER PLATING : Ni PLATING 0.5μm MIN				
UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	20 : 1	1	DIS-H-00004616	HT. SATO	SZ. ONO	20190131
APPROVED : TS. SAKATA		20090602	DRAWING NO.		EDC-320119-00-00	
CHECKED : MN. KENJO		20090602	PART NO.		DF50-2830SCFA	
DESIGNED : TT. OHSAKO		20090601	CODE NO.		CL665-0002-0-00	
DRAWN : TT. OHSAKO		20090601				