
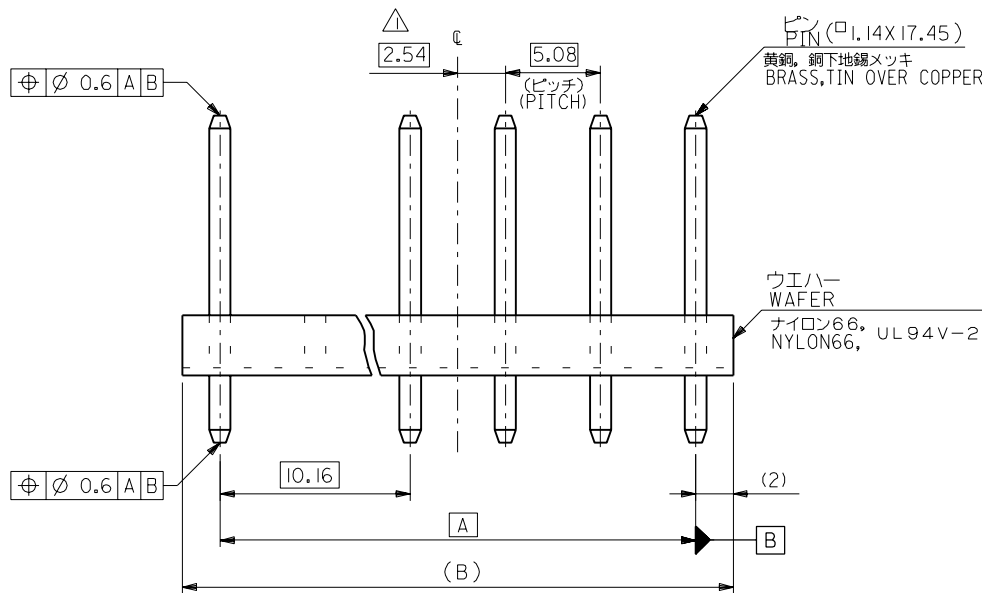
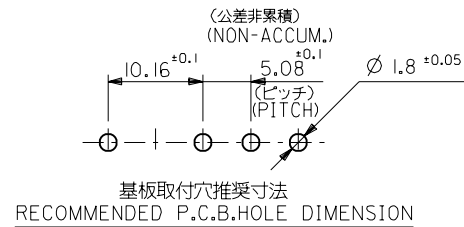


注記
NOTE

- △ 全極数が偶数の場合のみ適用。
TO BE APPLIED ONLY WHEN ALL CKTS. ARE EVEN.
- 2 ウエハーの反りは、長さ 25.4 に対して 0.2 最大。
CAMBER MUST BE 0.24 MAX. PER 25.4.

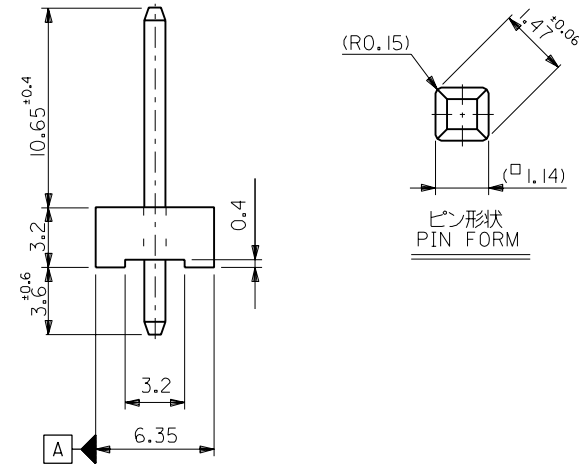

44.64	40.64	10-63-1083	5283-08A	8
39.56	35.56	↑ -1073	↑ -07A	7
34.48	30.48	↑ -1063	↑ -06A	6
29.4	25.4	↑ -1053	↑ -05A	5
24.32	20.32	↑ -1043	↑ -04A	4
19.24	15.24	↑ -1033	↑ -03A	3
14.16	10.16	10-63-1023	5283-02A	2
B	A	EDP NO.	ENG. NO.	極数 CKT.

角度 ANGLE	±3°							材料 MATERIAL	図中参照 SEE DRAWING
30 以上 OVER	±0.3							仕上げ FINISH	—H—
10 以上 30 未満 OVER UNDER	±0.25	C	変更 REVISED	(JC60644)	T.Y.	H.H.	%/3/13	適用電線範囲 WIRE RANGE	—H—
10 未満 UNDER	±0.2	B	変更 & 再作図 REVISED & REDRAWN	(J40818)	T.A.	H.H.	%/10/5	被覆外径 INS. RANGE	—H—
一般公差 GENERAL TOLERANCES		記号 LTR	変更内容 REVISION RECORD		DR.	CHK.	日付 DATE	DRAWN BY %/10/11 T.ASAKAWA	CHK'D BY %/3/4 S.A. HIRAMOTO
								APP'D BY %/3/4 M.FUKUSHIMA	尺度 SCALE —H—

MOLEX	MOLEX-JAPAN CO.,LTD. 日本モレックス株式会社
REVISE ONLY ON CAD SYSTEM	
TITLE 名称 KK 5.08/10.16 WAFAER ASS'Y	
DWG. NO.	REV
SD-5283-NA	C