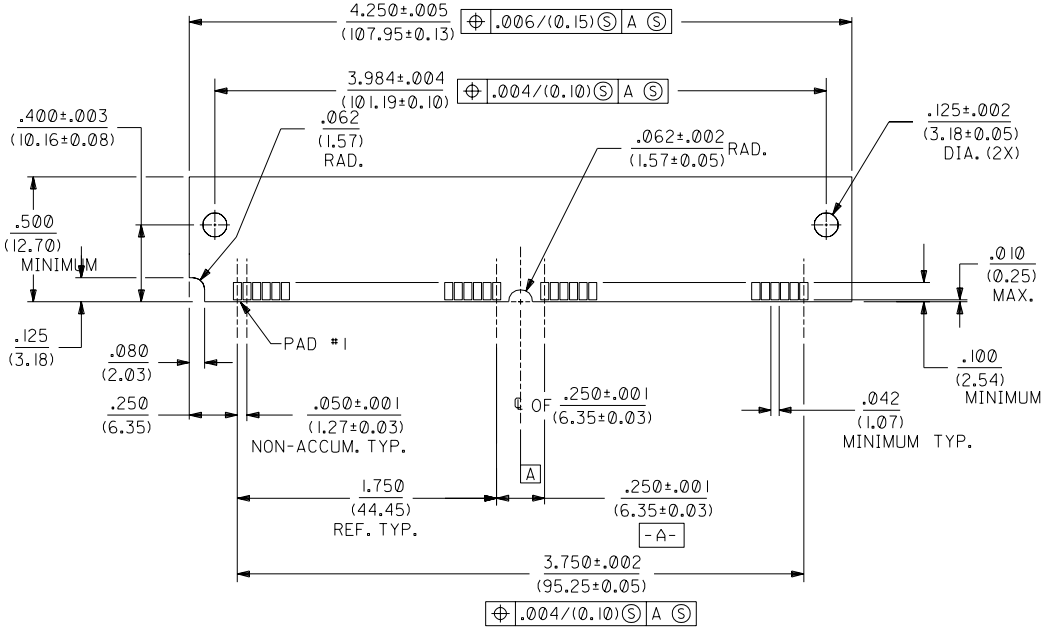

"SIMM" P.C. BOARD LAYOUT

NOTES:
1. CARD SLOT ACCEPTS P.C. BOARDS .050 +.004/-.003 (1.27 +0.10/-0.08) THICK, MEASURED OVER CONTACT PADS.
2. LOCATION OF LOWER CORNER OF MODULE BOARD.
3. PRODUCT SPEC PS-78954 APPLIES.
4. CENTER PEG IS AN INTERFERENCE FIT TO RECOMMENDED P.C. BOARD HOLE.

MATERIALS:
HOUSING: LCP, GLASS FILLED, 94V-0. COLOR: BLACK.
LATCH: STAINLESS STEEL.
TERMINAL: PHOSPHOR BRONZE, POST PLATED
30 µin./(0.76 µm) MINIMUM GOLD IN CONTACT AREA AND
150 µin./(3.81 µm) MINIMUM TIN IN TAIL AREA OVER
75 µin./(1.91 µm) MINIMUM NICKEL OVERALL.

THE PRIMARY SHIPPING CARTON WILL BE LABELED "COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC". CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH LEAD.

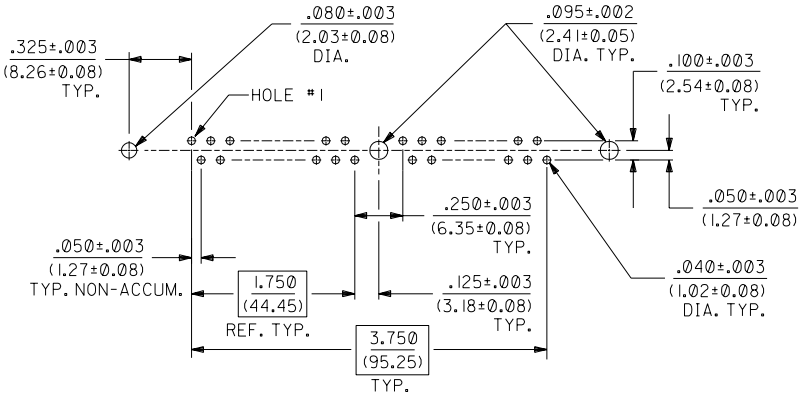

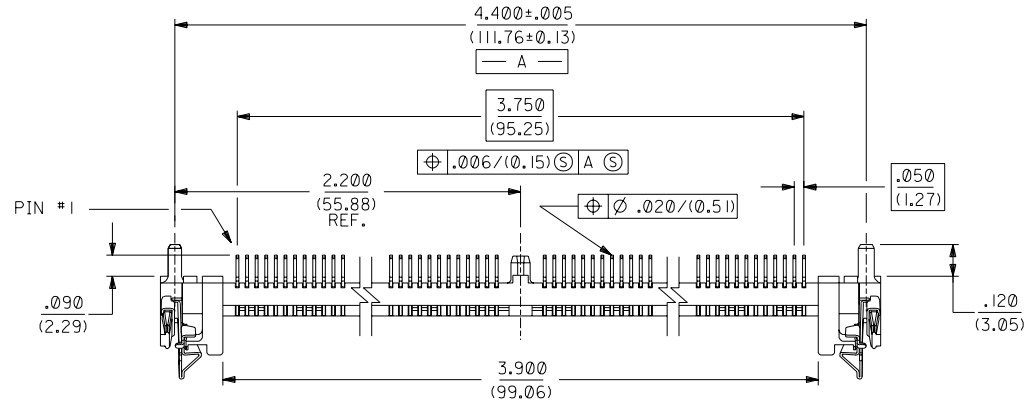

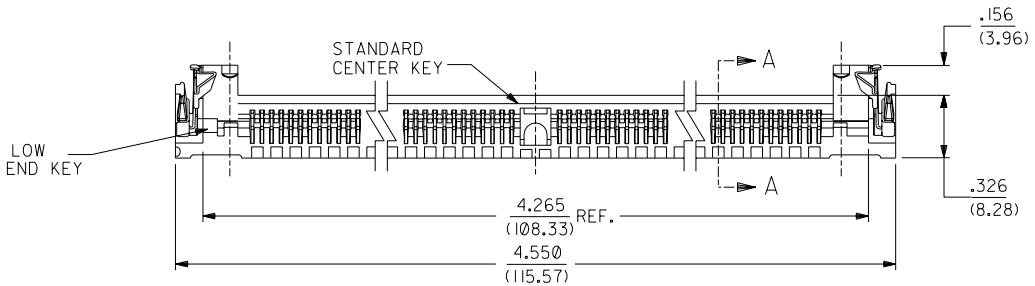

RECOMMENDED SOCKET
P.C. BOARD HOLE PATTERN

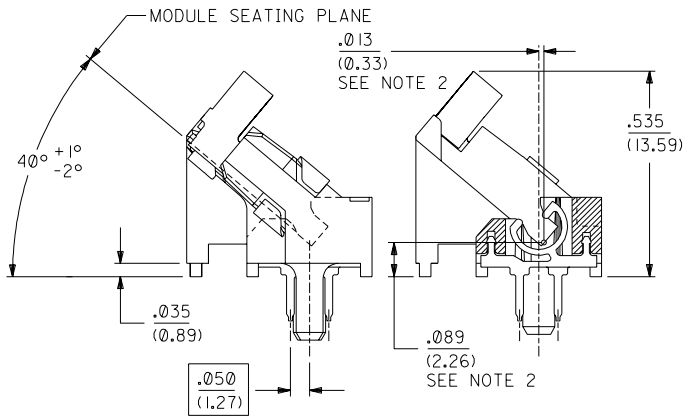

END VIEW
SCALE 4:1

SECTION A-A
SCALE 4:1

LTR.	REVISIONS
C	LEAD FREE UCP2004-1582 RWHITE 04/03/03
B	REVISED PER ECN# U51393 GMY 7-25-95
A	RELEASED DRAWING PER ECN#U50199 MJS 10-30-94

MFG. SH. REV.

▽ = 0 ▼ = 0 REVISE ONLY ON CAD SYSTEM

DIMENSIONS SHOWN (METRIC) INCH
UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± 1/2°

	INCH	METRIC
3 PLACE	± .010	---
2 PLACE	± .014	± 0.25
1 PLACE	---	± 0.36

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DRWG. BY MJS | CHK'D. BY | APP'D. BY | SCALE 2:1

TITLE: SALES ASSY. 72 CIRCUIT 40° METAL LATCH LOW KEY SINGLE ROW SIMM SOCKET

molex MOLEX INCORPORATED LISLE,ILL. 60532 U.S.A.

SHEET NO. 1 OF 1 | DATE 10/30/94

PART NO. 15-82-0647 | DRWG. NO. SDA-78976-7244

FILE NAME 789767244 DGN

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

DIV. DA | SIZE C

78976