78964

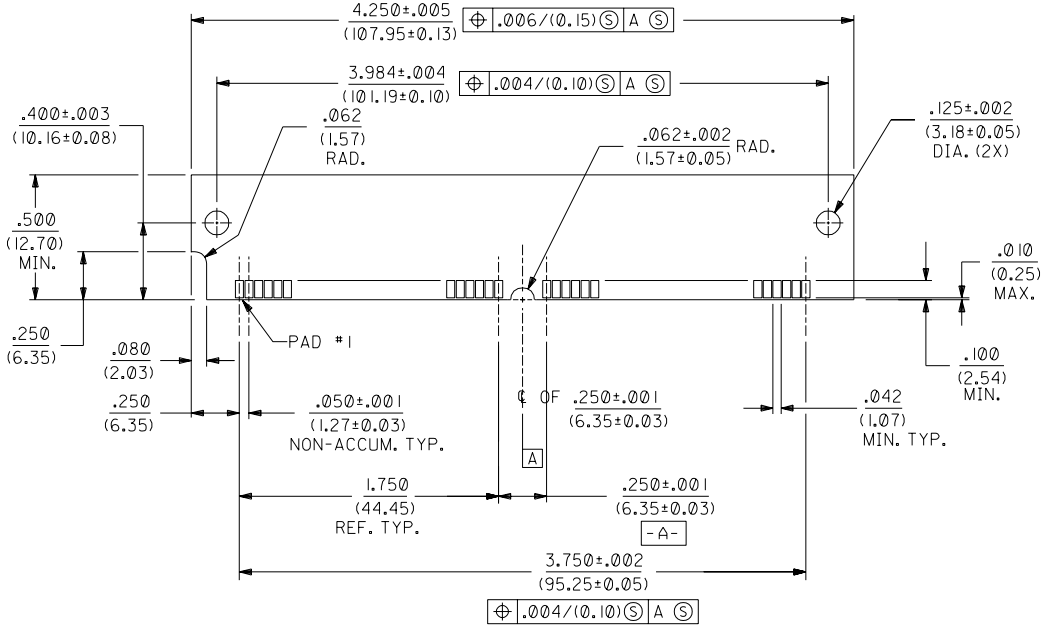

"SIMM" P.C. BOARD LAYOUT

NOTES:
1. CARD SLOT ACCEPTS P.C. BOARDS .050 +.004/-.003 (1.27 +0.10/-0.08) THICK, MEASURED OVER CONTACT PADS.
2. PRODUCT SPEC PS-78954 APPLIES.
3. LOCATION OF LOWER CORNER OF MODULE BOARD.
4. CENTER PEG IS AN INTERFERENCE FIT TO RECOMMENDED P.C. BOARD HOLE.

MATERIALS:
HOUSING: LCP, GLASS FILLED, 94V-0. COLOR: BLACK.
LATCH: STAINLESS STEEL.
TERMINAL: PHOSPHOR BRONZE, POST PLATED
200 µIN./(5.08µm) MIN. TIN IN CONTACT AREA AND
150 µIN./(3.81µm) MIN. TIN IN TAIL AREA OVER
50 µIN./(1.27µm) MIN. NICKEL OVERALL.

*THE PRIMARY SHIPPING CARTON WILL BE LABELED "COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC". CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH LEAD.

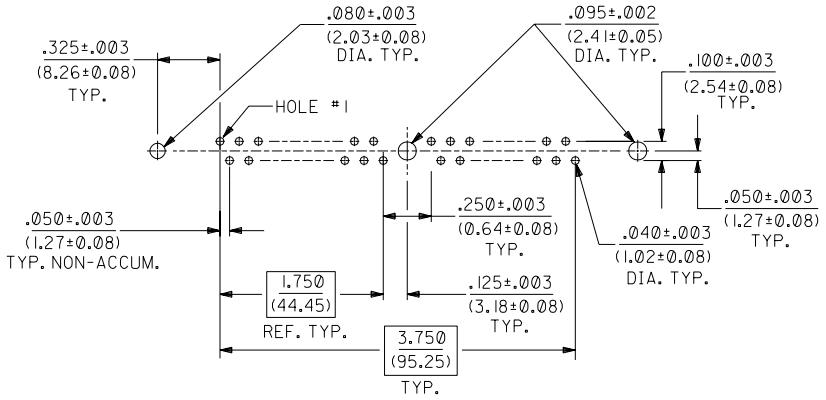

RECOMMENDED SOCKET
P.C. BOARD HOLE PATTERN

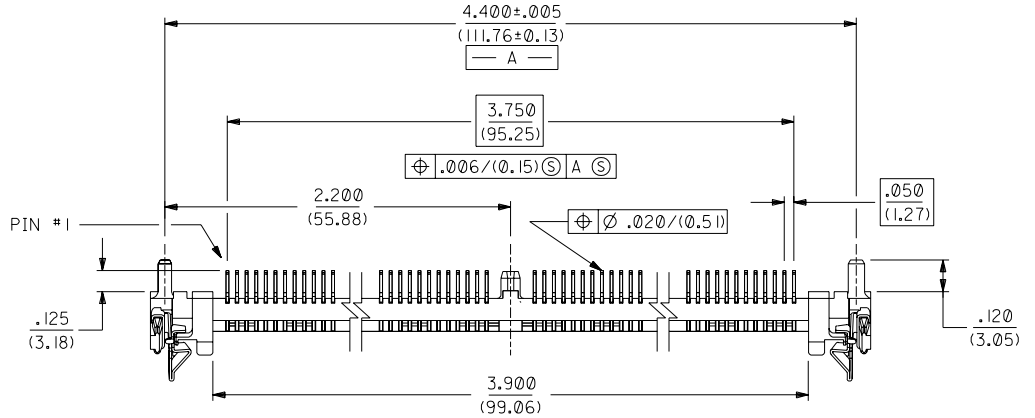

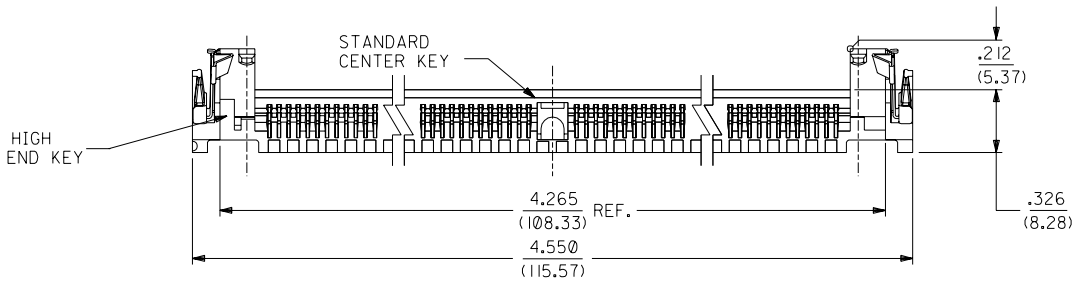

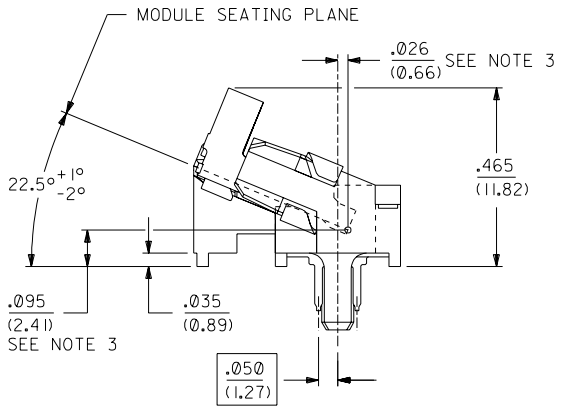

END VIEW
SCALE 4:1

MFG.	SH.	REV.	LTR.	REVISIONS
			F	LEAD FREE UCP2004-1582 RWHITE 04/02/25
			E	REVISED PER ECN* U51394 GMY 7-24-95
			D	REVISED PEG LENGTH PER ECR*U30751 MJS 6-8-93
			C	TIN/LEAD WAS GOLD PER ECN U21046 PDB 07-15-92
			B	REMOVED TRACKING TOES PER ECN *U20914 PDB 06-17-92
			A	X-RELEASE PER ECN U20271 DKS 2-18-92

▽ = 0 ▼ = 0 REVISE ONLY ON CAD SYSTEM

DIMENSIONS SHOWN (METRIC) INCH
UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± 1/2°

	INCH	METRIC
3 PLACE	± .010	---
2 PLACE	± .014	± 0.25
1 PLACE	---	± 0.35

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DRWG. BY DKS | CHK'D. BY | APP'D. BY | SCALE 2:1

TITLE
SALES ASSEMBLY
22.5° METAL LATCH HIGH KEY
SINGLE ROW SIMM SOCKET

molex MOLEX INCORPORATED LISLE,ILL. 60532 U.S.A.
SHEET NO. 1 OF 1
DATE 2/18/92
PART NO. 15-82-0679
DRWG. NO. SDA-78964-7233
FILE NAME S78964X51 DGN

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

DIV. DA | SIZE C

78964