

Basic features

Approval/Conformity	CE UKCA cULus WEEE
Basic standard	IEC 60947-5-2 IEC 60947-5-7

Display/Operation

Function indicator	Adjustment indicator
Power indicator	no

Electrical connection

Cable diameter D	4.60 mm
Cable length L	0.2 m
Connection	M12x1-Male, 4-pin, A-coded
Connection type	Cable with connector, 0.20 m, PUR
Polarity reversal protected	yes
Protection against device mix-ups	yes
Short-circuit protection	yes

Electrical data

Limit frequency -3 dB	1000 Hz
Load resistance R_L min.	2000 Ohm
No-load current I_0 max. at U_e	15 mA
Operating voltage U_b	15...30 VDC
Protection class	II
Rated insulation voltage U_i	250 V AC
Rated operating voltage U_e DC	24 V
Ripple max. (% of U_e)	15 %
Slope U	1.47 V/mm

Environmental conditions

Ambient temperature	-40...80 °C
Contamination scale	3
EN 60068-2-27, Shock	Half-sinus, 30 g _n , 11 ms
EN 60068-2-6, Vibration	55 Hz, amplitude 1 mm, 3x30 min
IP rating	IP68

Functional safety

MTTF (40 °C)	550 a
--------------	-------

Interface

Analog output	Analog, voltage 0...10 V
Output characteristic	falling on approach
Output voltage at SI max.	10 V
Output voltage at SI min.	0 V
Output voltage at Se	5 V

Inductive Sensors
BAW M12MM-UAC70G-BP00,2-GS04
Order Code: BAW004E



Material

Housing material	Brass, Nickel-free coated
Material jacket	PUR
Material sensing surface	LCP

Range/Distance

Linearity range SI	0.2...7 mm
Measuring range	0.2...7 mm
Non-linearity max.	±70 µm
Repeat accuracy per BWN	±7 µm
Temperature drift max. from end value	±8.0 %

Mechanical data

Dimension	Ø 12 x 63 mm
Installation	non-flush
Size	M12x1
Tightening torque	10 Nm

Remarks

Values referenced to axial approach of St 37 target. For other materials correction factors are applied.

We recommend to connect the teach line to the negative lead (L-) when not in use.

At temperatures below -25°C the cable must be fixed in place.

The working range can be taught using the Teach line or the BAE PD-AW-009-S04 programmer (order code BAE00MN).

Scattering (e.g. due to manufacturing tolerances) is described by the tolerance T at Se. This can be approximated using the formula: $T = (sl_{max} + sl_{min}) / 20 = \pm xx \text{ mm}$.

UL-MARKINGS: - For use in NFPA 79 Applications only - Adapters providing field wiring means are available from the manufacturer. Refer to manufacturers information.


For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.


Connector Drawings



Wiring Diagrams



Technical Drawings

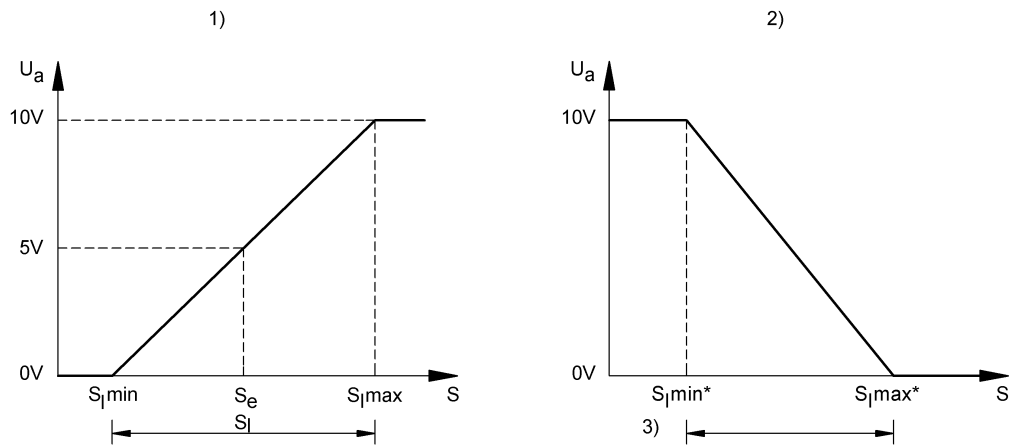

- 1) Standard characteristic curve
- 2) Reduced measuring range
- 3) Minimum width $S_I/3$