

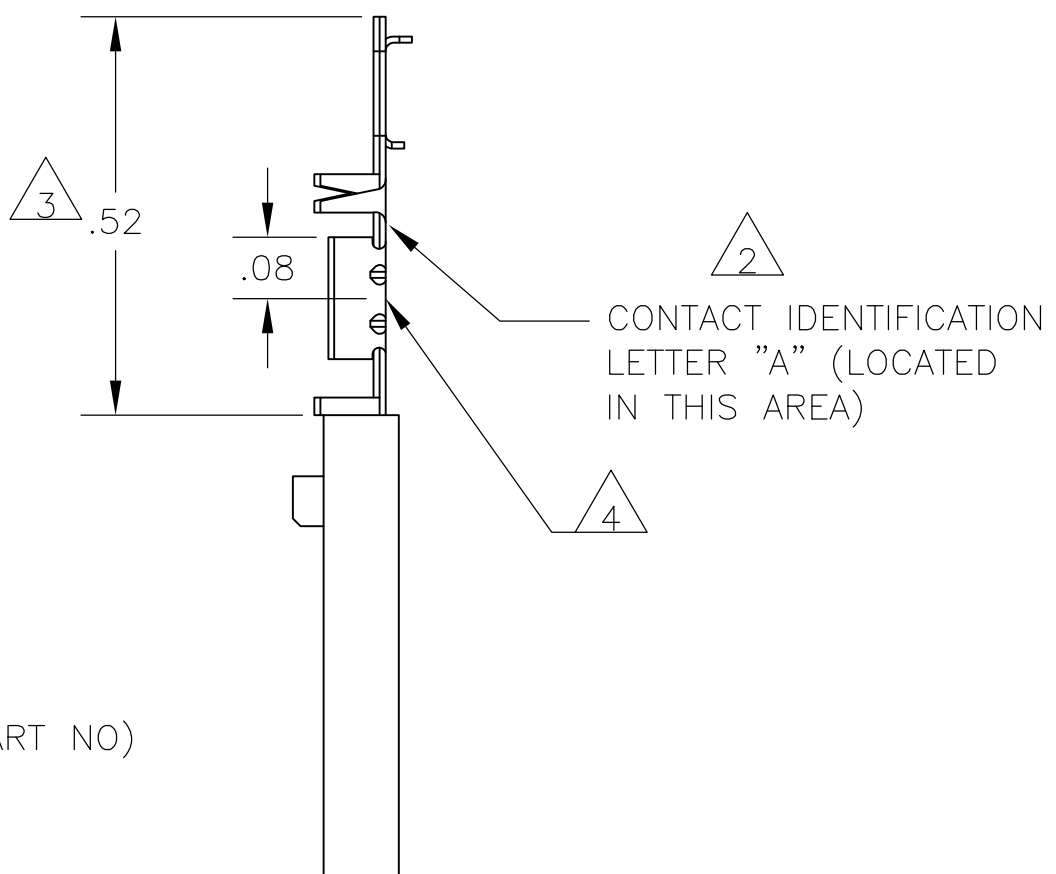


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00		H	EC 0G3C 0759 04	03FEB05	BSV	JLG
			H1	REVISED PER ECO-09-020689	02SEP09	KK	AEG

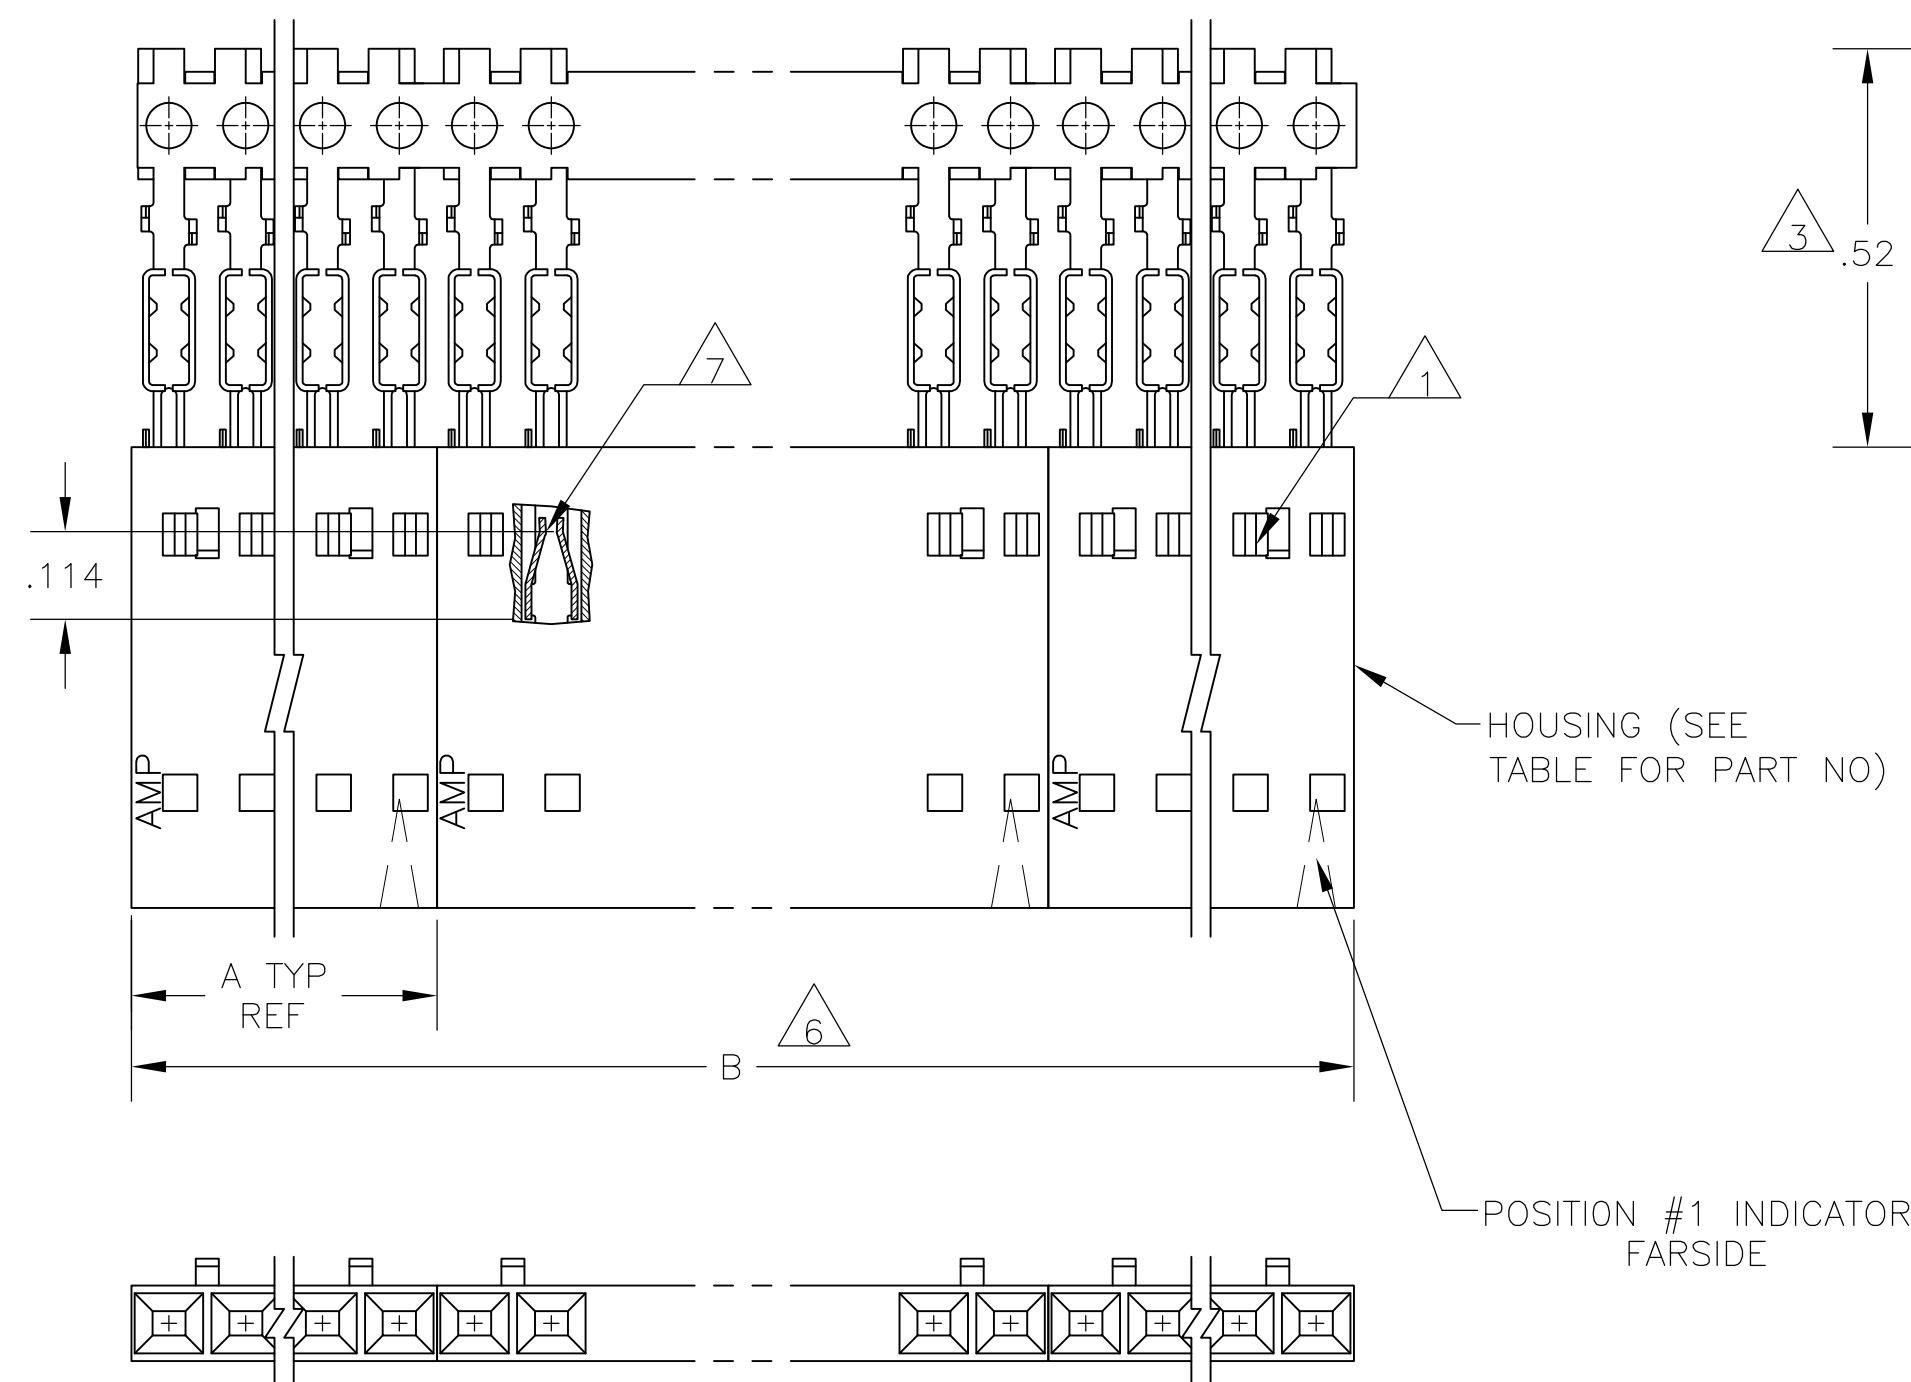

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #26-#30 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103901
- 6 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- 7 POINT OF MEASUREMENT FOR PLATING THICKNESS (INSIDE BEAMS)
- 8 MAXIMUM ALLOWABLE BOW OF ASSEMBLY NOT TO EXCEED .055.
- 9 CONTACTS: .000030 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN-LEAD ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- 10 CONTACTS: .000030 GOLD IN THE CONTACT AREA, .000050-.000100 MATTE TIN ON THE TERMINATION AREA, ALL OVER .000050 NICKEL
- 11 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

11	OBSOLETE	10	2	2.40	1.198	1-103648-1	12	6-103973-1
11	OBSOLETE	10	2	2.20	1.098	1-103648-0	11	6-103973-0
		10	2	2.00	.998	103648-9	10	5-103973-9
11	OBSOLETE	10	2	1.80	.898	103648-8	9	5-103973-8
11	OBSOLETE	10	2	1.60	.798	103648-7	8	5-103973-7
11	OBSOLETE	10	2	1.40	.698	103648-6	7	5-103973-6
11	OBSOLETE	10	4	2.39	.598	103648-5	6	5-103973-5
		10	4	1.99	.498	103648-4	5	5-103973-4
		10	5	1.99	.398	103648-3	4	5-103973-3
		10	8	2.40	.298	103648-2	3	5-103973-2
		10	10	2.00	.198	103648-1	2	5-103973-1
11	OBSOLETE	9	2	2.40	1.198	1-103648-1	12	1-103973-1
11	OBSOLETE	9	2	2.20	1.098	1-103648-0	11	1-103973-0
		9	2	2.00	.998	103648-9	10	103973-9
11	OBSOLETE	9	2	1.80	.898	103648-8	9	103973-8
11	OBSOLETE	9	2	1.60	.798	103648-7	8	103973-7
11	OBSOLETE	9	2	1.40	.698	103648-6	7	103973-6
11	OBSOLETE	9	4	2.39	.598	103648-5	6	103973-5
		9	4	1.99	.498	103648-4	5	103973-4
		9	5	1.99	.398	103648-3	4	103973-3
		9	8	2.40	.298	103648-2	3	103973-2
		9	10	2.00	.198	103648-1	2	103973-1
PLATING		6	B	A	HOUSING PART NUMBER	NO OF POSN	ASSEMBLY PART NUMBER ON STRIP	

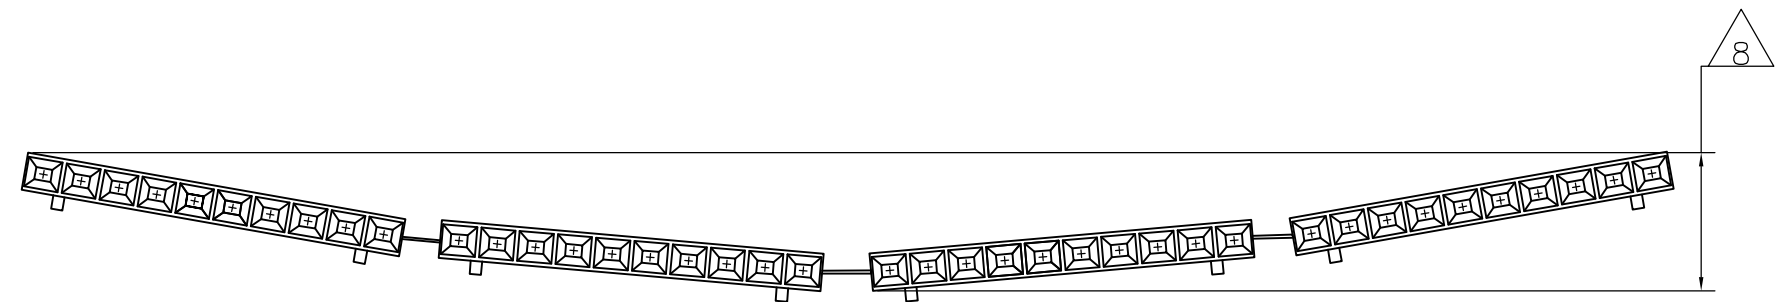

EXMPL: STRIP ASSEMBLY
SCALE 2:1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN L. MAYER 05 NOV 1986
CHK P.C.DEJONG 12-11-86
APVD J SCHIFFER 13-11-86

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± .02
3 PLC ± .005
4 PLC ± -
ANGLES ± -
FINISH SEE TABLE

MATERIALS:
HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR: BLACK
CONTACT: PHOSPHOR BRONZE

DWN L. MAYER 05 NOV 1986
CHK P.C.DEJONG 12-11-86
APVD J SCHIFFER 13-11-86

PRODUCT SPEC 108-25034
APPLICATION SPEC 114-25026
WEIGHT -

CUSTOMER DRAWING

Tyco Electronics
Tyco Electronics Corporation
Harrisburg, Pa 17105-3608

RCPT ASSY, AMPMODU MTE, SINGLE ROW, .100 CL, WITH GUIDE RIBS, FOR #26-#30 AWG WIRE SIZE, STRIP FORM

SIZE A2
CAGE CODE 00779
DRAWING NO C-103973

RESTRICTED TO -

SCALE 4:1
SHEET 1 OF 1
REV H1