




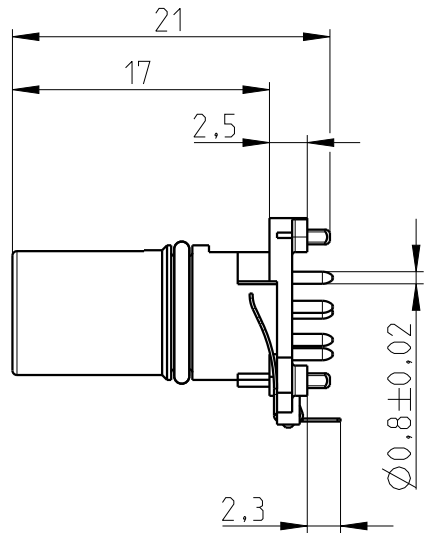

socket face female



PCB layout
(advice)

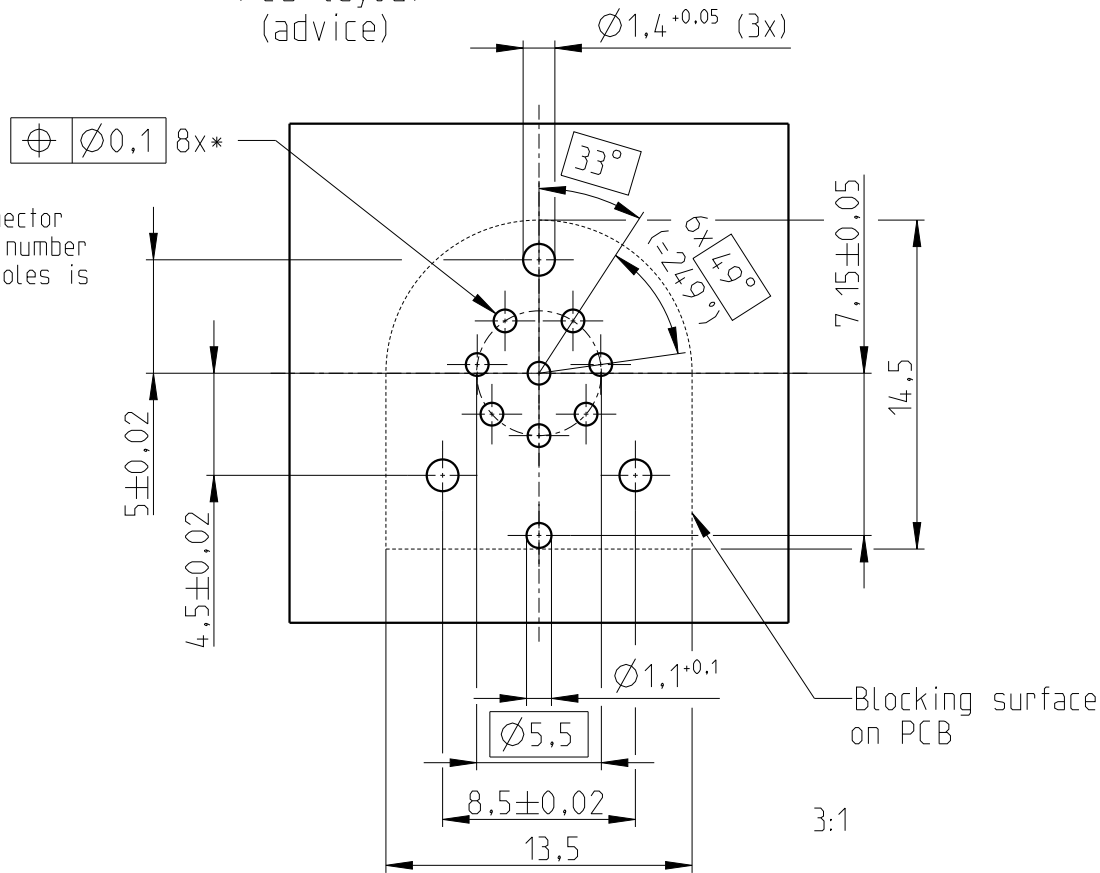

*The drawing represents connector with 8 positions. At reduced number of positions, the number of holes is reduced accordingly

Recommended solder paste thickness 150 µm

Typ	Pin [mm]	Hole Ø [mm]	Residual ring Ø [mm]	Template Ø [mm]
Contact	See brochure "Connectors for SMT production"			
Shielding Pin	0.8x0.2	1.1	2.1	2

 DIN A3		document-no. / ri 097169674 / 03		article-no.	scale 2:1	- Simplified representation - Document excluded from change process - Linear dimensions [mm]
		date 21.07.25	document-type TECDOC 2D_Productdrawing			
		description SACC -CI-M12FS-8CON-L180-THR SH...				
page 1	of 1					

- EN ISO 291 23/50