

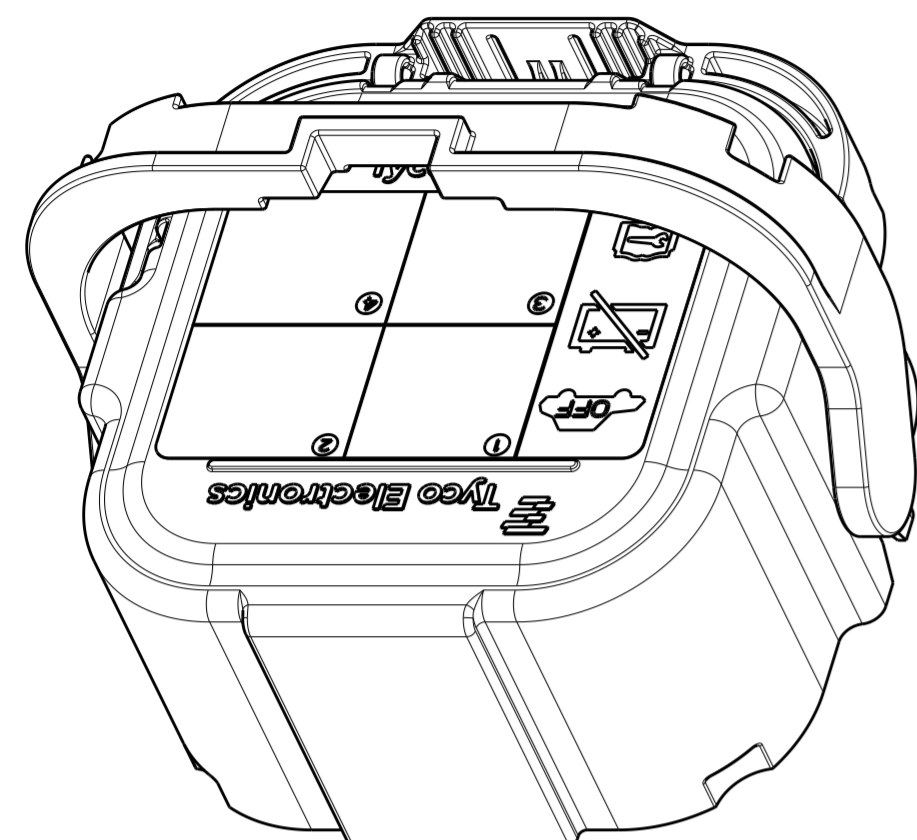


REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
C		REVISED PER ECO-13-008657	15MAY2013	DD JS
D		REVISED PER ECO-13-017499	21FEB2014	DD JS
E		REVISED PER ECO-14-015284	09OCT2014	DD JS
E1		REVISED PER ECO-15-006016	20APR2015	DD JS


LEVER IN PRE-STAGE POSITION

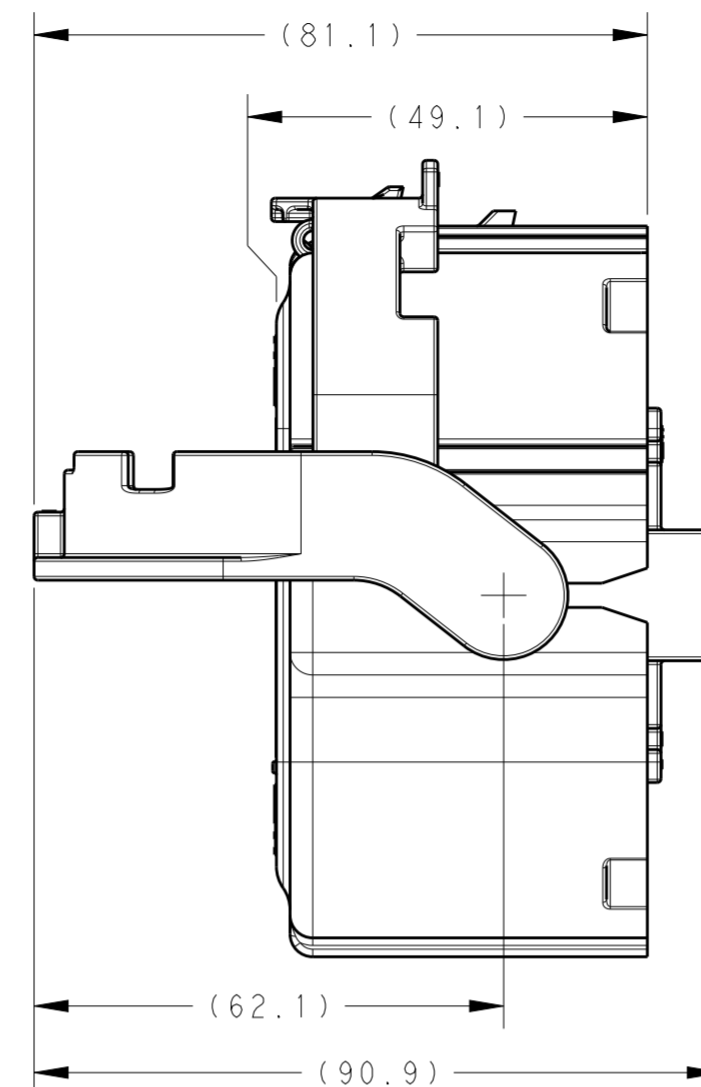




ISOMETRIC VIEW
SCALE 1:1

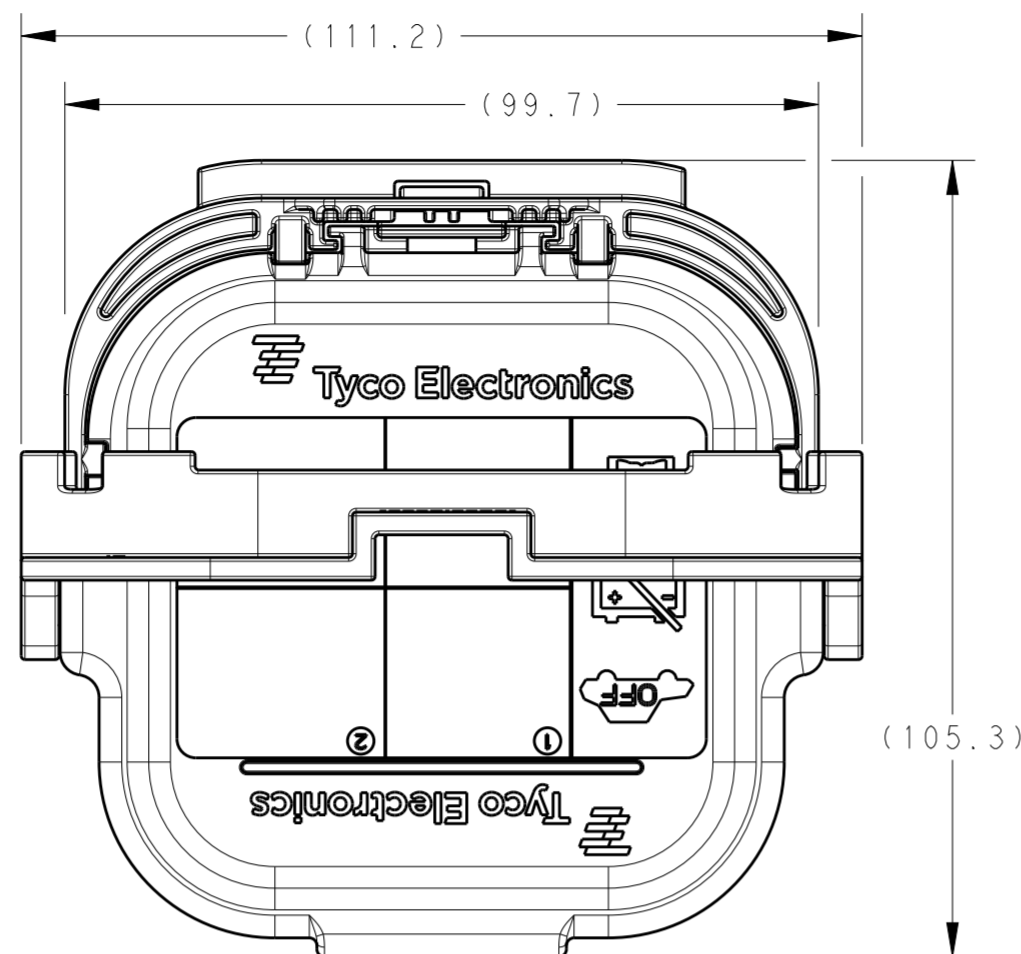

LEVER IN LOCKED POSITION

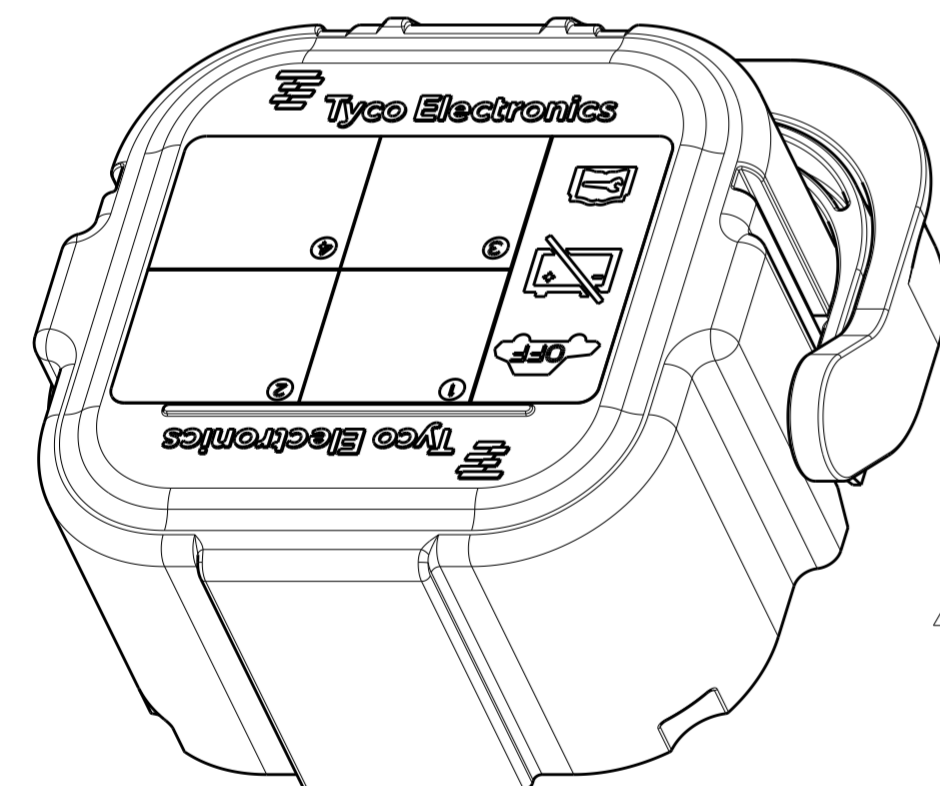

ISOMETRIC VIEW
SCALE 1:1

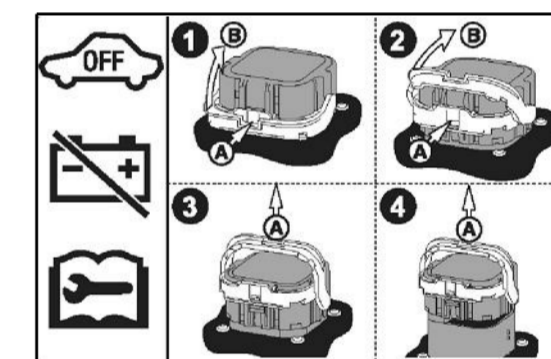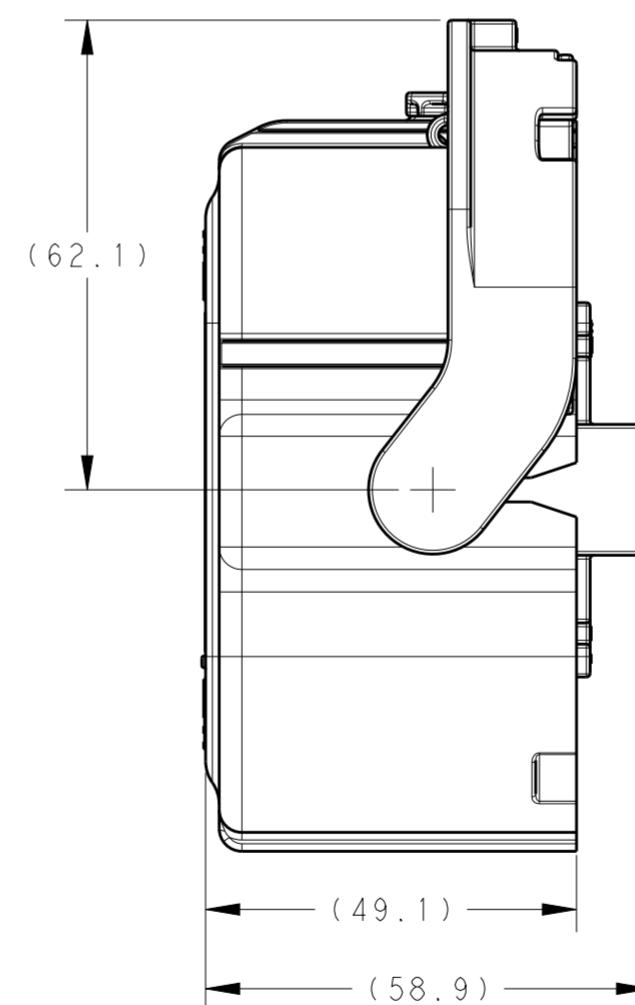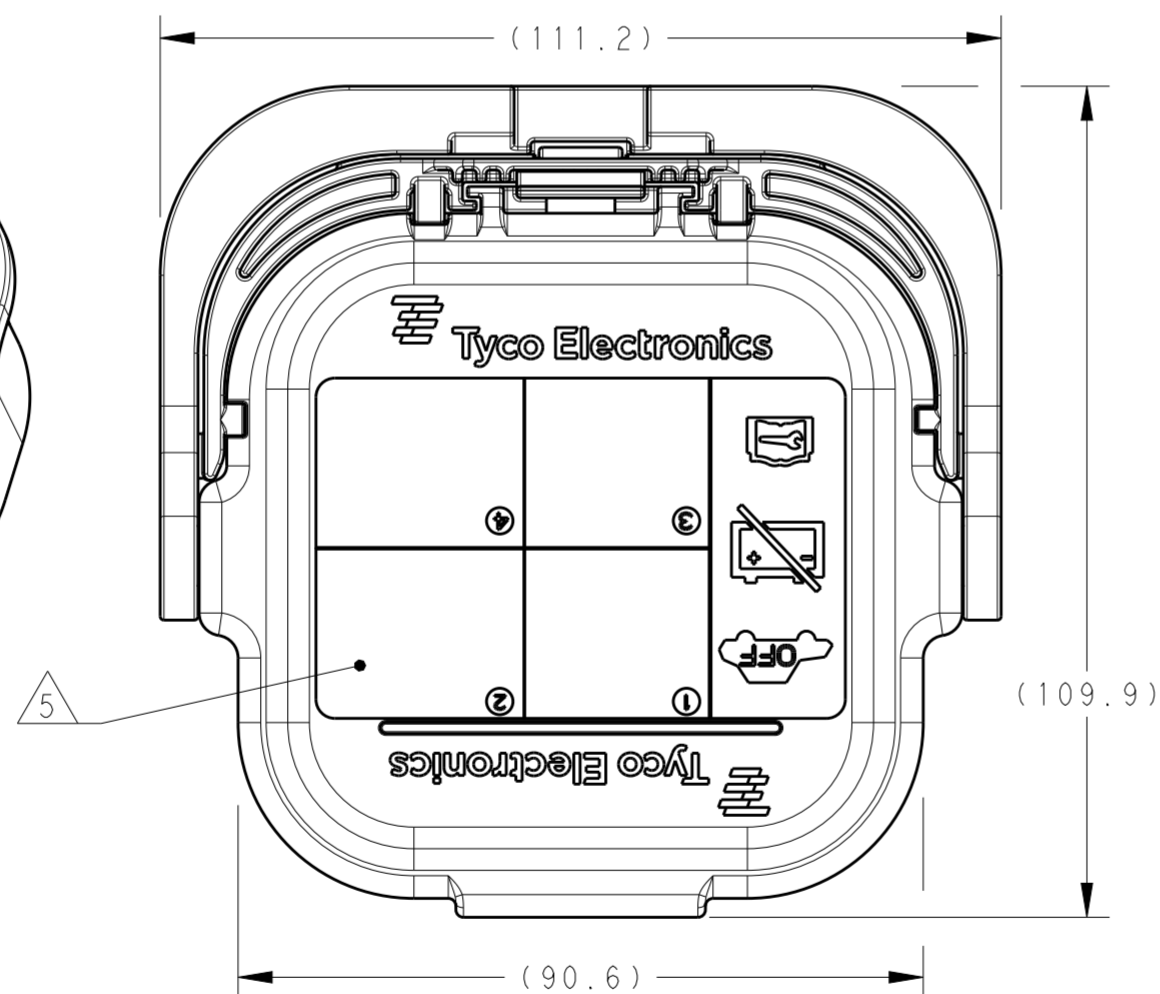


INNER LEVER COLOR	PART WEIGHT (g)	FUSE RATING	PART NO.
E NATURAL/OFF-WHITE	261.25	SHUNT	2-2103212-7
E1 BLACK	525.60	350A (EV)	2-2103212-1
NATURAL/OFF-WHITE	525.60	250A (EV)	1-2103212-9
NATURAL/OFF-WHITE	525.60	200A (EV)	1-2103212-8
E BLACK	261.25	SHUNT	1-2103212-7
BLACK	525.60	350A	1-2103212-2
NATURAL/OFF-WHITE	525.60	350A	1-2103212-1
BLACK	525.60	250A	2103212-9
BLACK	525.60	200A	2103212-8


- 1 INNER HOUSING MAY BE ASSEMBLED ROTATED 180° FROM AS SHOWN.
- 2 ASSEMBLY / WORK INSTRUCTIONS: 408-10432
PRODUCT SPECIFICATION: 108-127000
APPLICATION SPECIFICATION: 501-127000
- 3 NOTE DELETED.
- 4 SEE TABLE AND SHEET 2 FOR FUSE RATINGS AND KEYING.
- 5 IMAGE FOR REFERENCE ONLY, SHOWS LABEL ORIENTATION.
- 6 ACTUAL APPEARANCE OF LABEL.

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009		DWN A BOYER 14JUL2011	TE Connectivity	
DIMENSIONS: mm		CHK A BOYER 14JUL2011		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD A GUANCO 14JUL2011	NAME	
0 PLC ±	1 PLC ±	PRODUCT SPEC	PLUG ASSEMBLY	
2 PLC ±	3 PLC ±	APPLICATION SPEC	MANUAL SERVICE DISCONNECT	
4 PLC ±	ANGLES ±	WEIGHT SEE TABLE	SIZE A200779	CAGE CODE C-2103212
MATERIAL -	FINISH -	CUSTOMER DRAWING	SCALE 1:1	SHEET 1 OF 2


REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
-	-	SEE SHEET 1	-	-

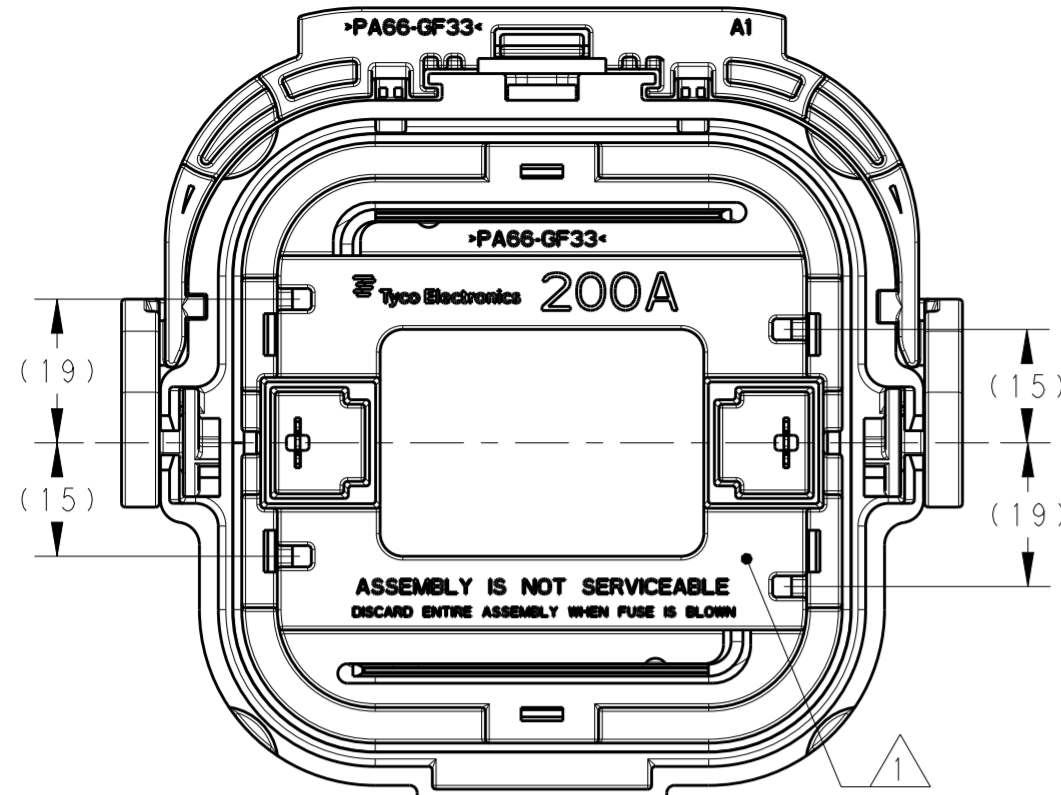


2103212-8 & 1-2103212-8
 FUSE RATING: 200A

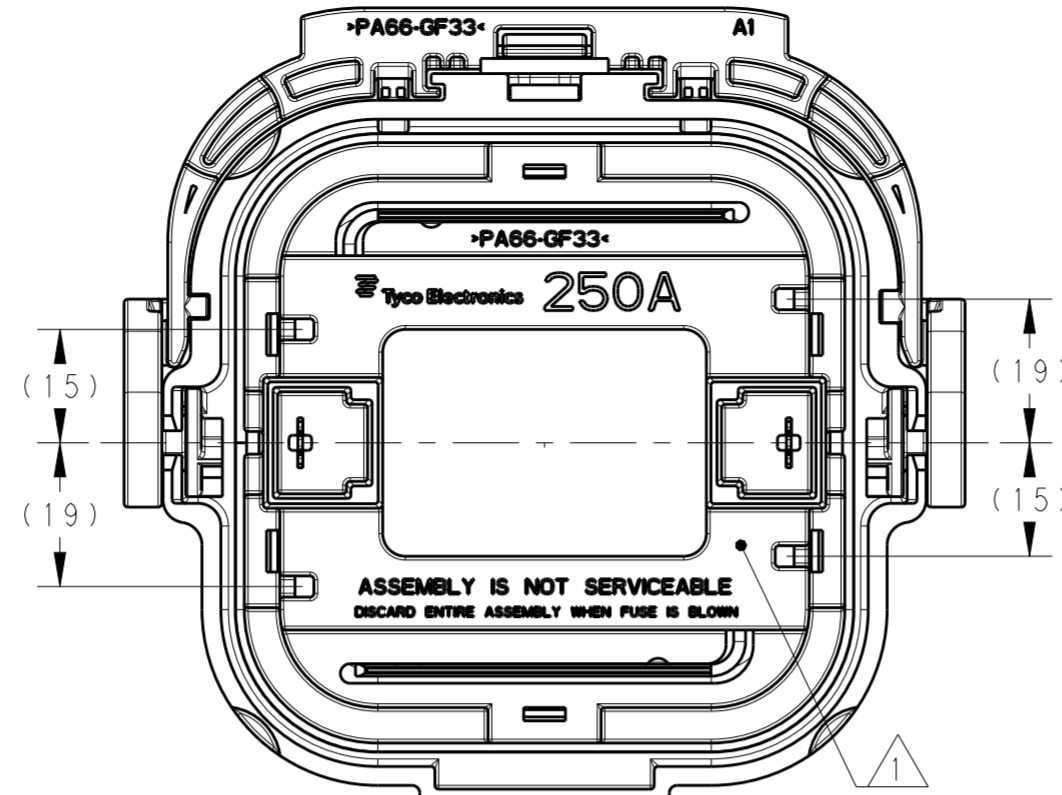

2103212-9 & 1-2103212-9
 FUSE RATING: 250A

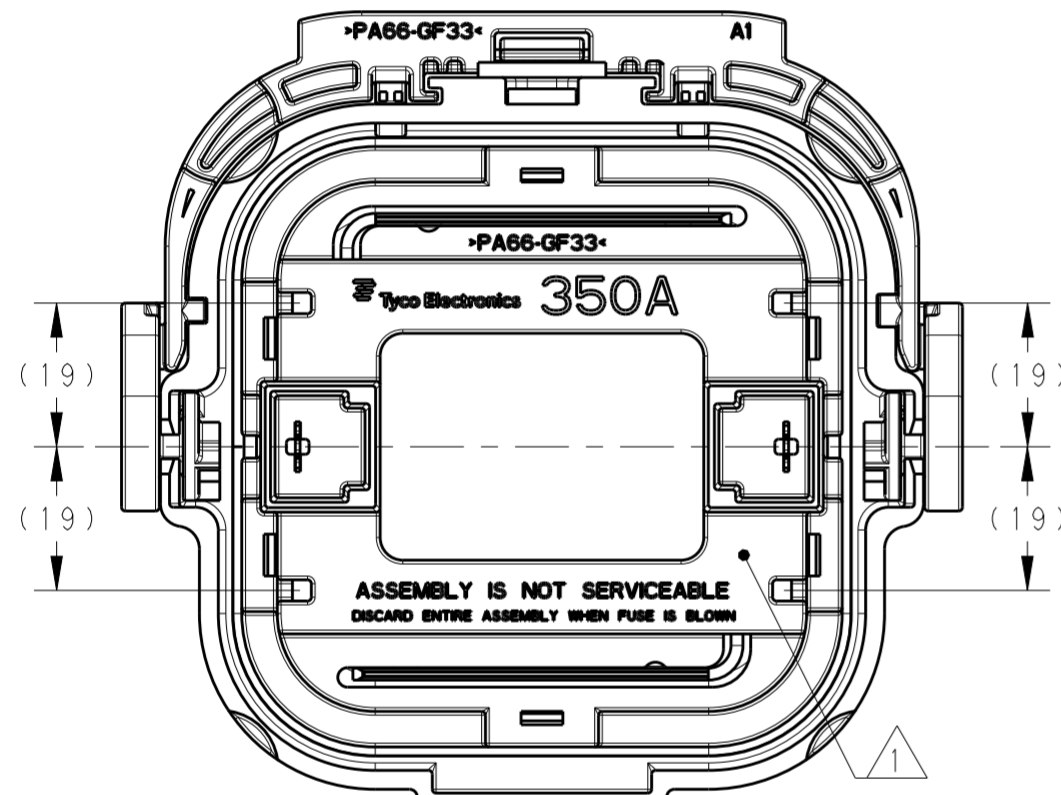

1-2103212-1, 1-2103212-2 & 2-2103212-1
 FUSE RATING: 350A

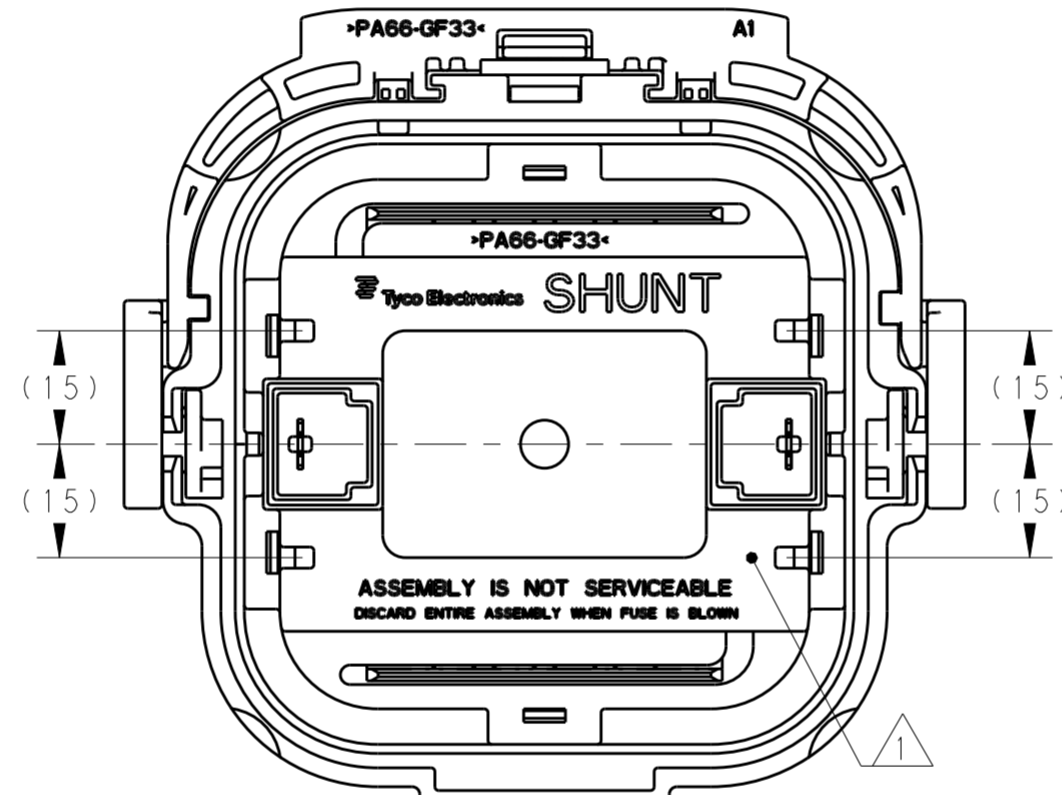

1-2103212-7 & 2-2103212-7 E
 SHUNT

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009		DWN A. BOYER 14 JUL 2011	STE TE Connectivity													
DIMENSIONS: mm		CHK A. BOYER 14 JUL 2011														
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD A. GUANCO 14 JUL 2011														
<table border="0"> <tr><td>0 PLC</td><td>±</td></tr> <tr><td>1 PLC</td><td>±</td></tr> <tr><td>2 PLC</td><td>±</td></tr> <tr><td>3 PLC</td><td>±</td></tr> <tr><td>4 PLC</td><td>±</td></tr> <tr><td>ANGLES</td><td>±</td></tr> <tr><td>FINISH</td><td>-</td></tr> </table>		0 PLC		±	1 PLC	±	2 PLC	±	3 PLC	±	4 PLC	±	ANGLES	±	FINISH	-
0 PLC	±															
1 PLC	±															
2 PLC	±															
3 PLC	±															
4 PLC	±															
ANGLES	±															
FINISH	-															
MATERIAL	-	APPLICATION SPEC - 2	NAME PLUG ASSEMBLY MANUAL SERVICE DISCONNECT													
CUSTOMER DRAWING		WEIGHT SEE TABLE	SIZE A200779													
		SCALE 1:1	DRAWING NO. C-2103212													
		SHEET 2 OF 2	RESTRICTED TO -													
		REV E1														