
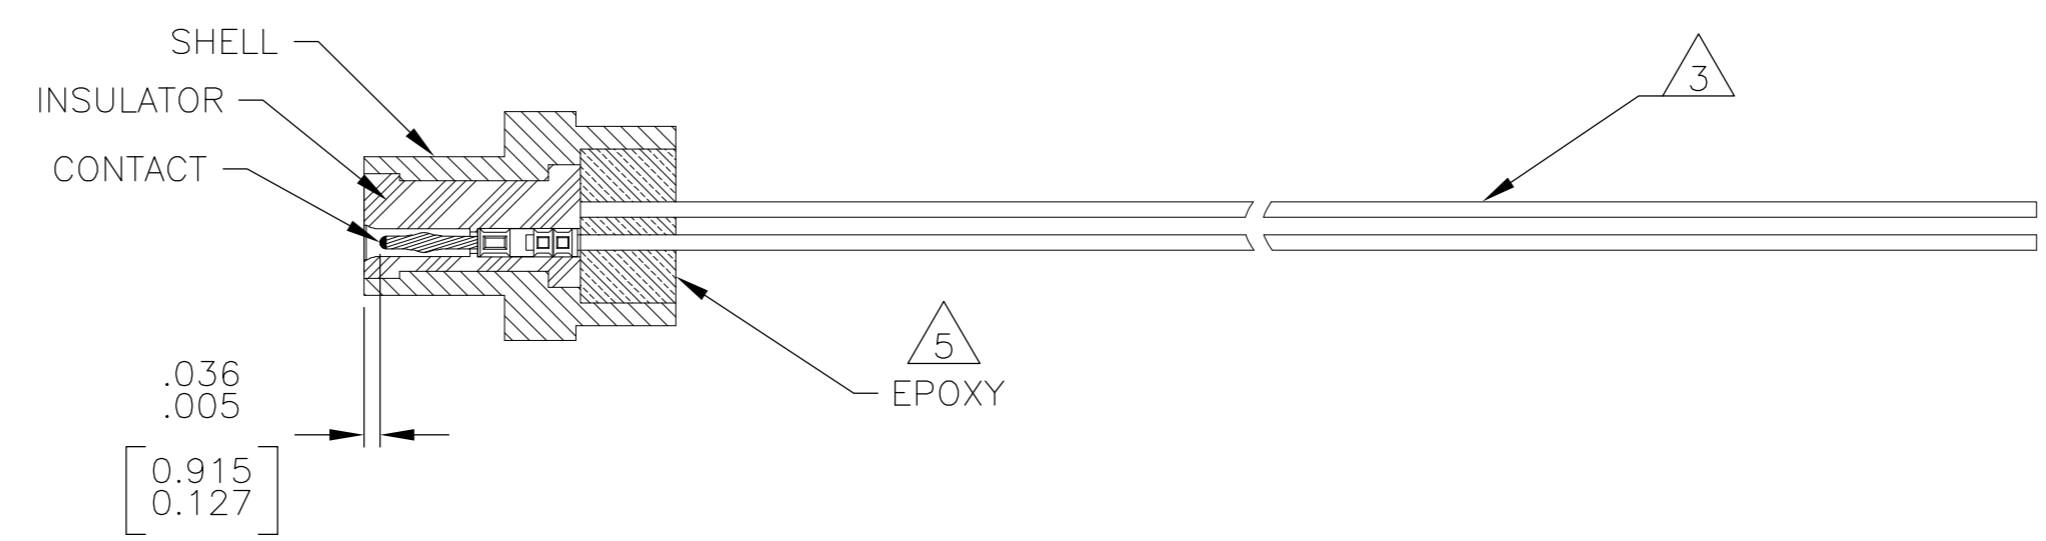
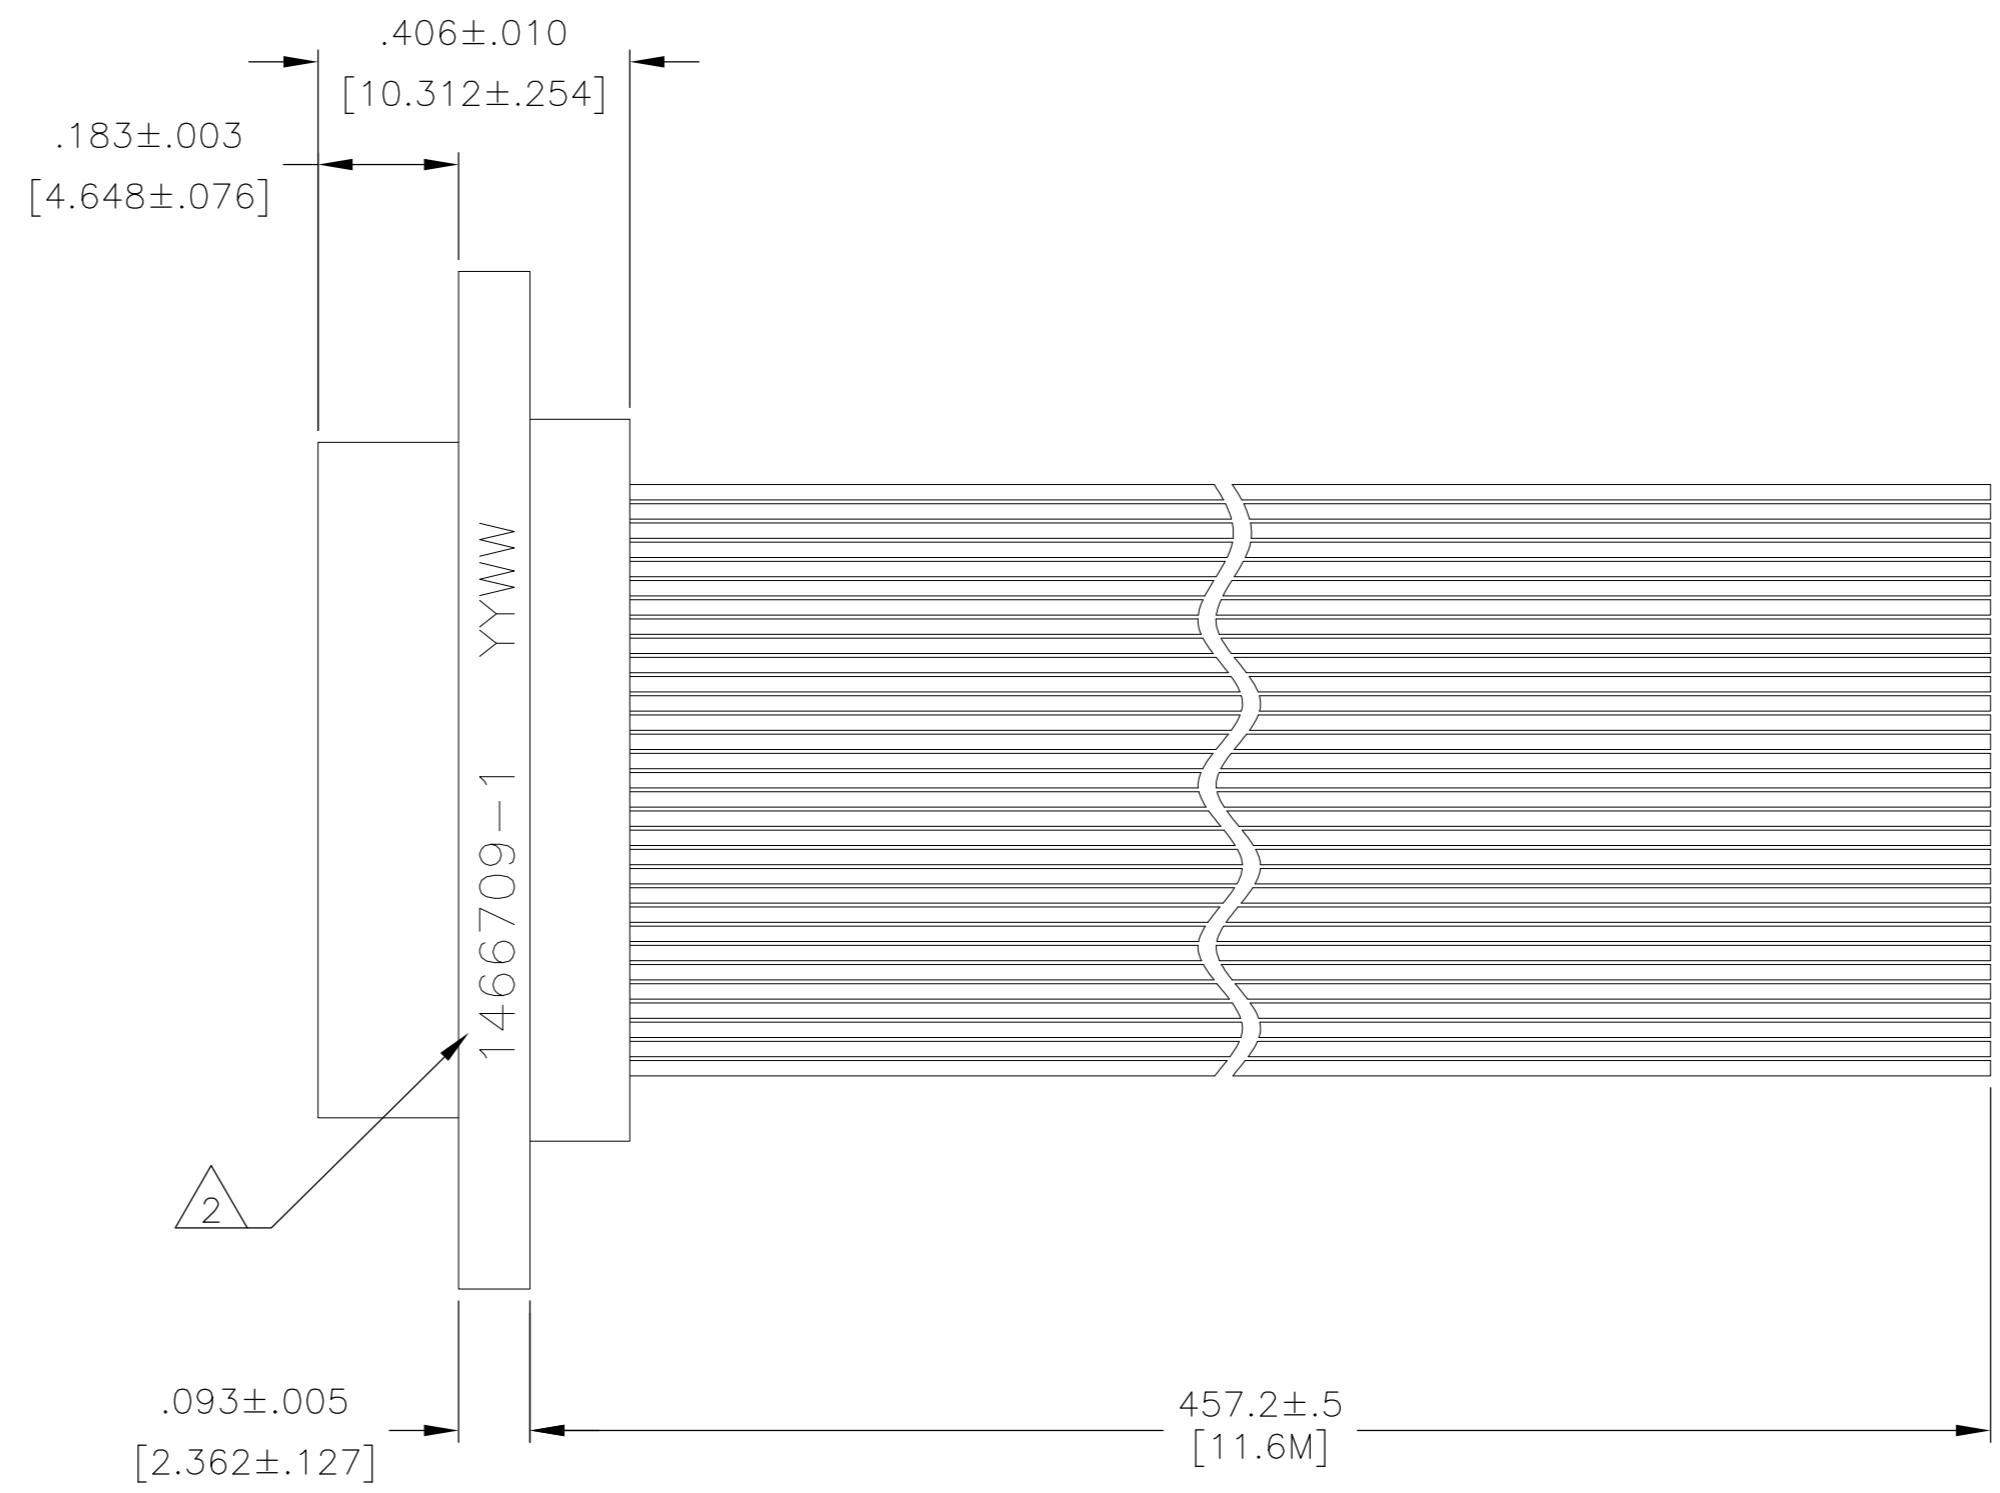


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
A		INITIAL RELEASE	2 FEB 17	CAS CAS

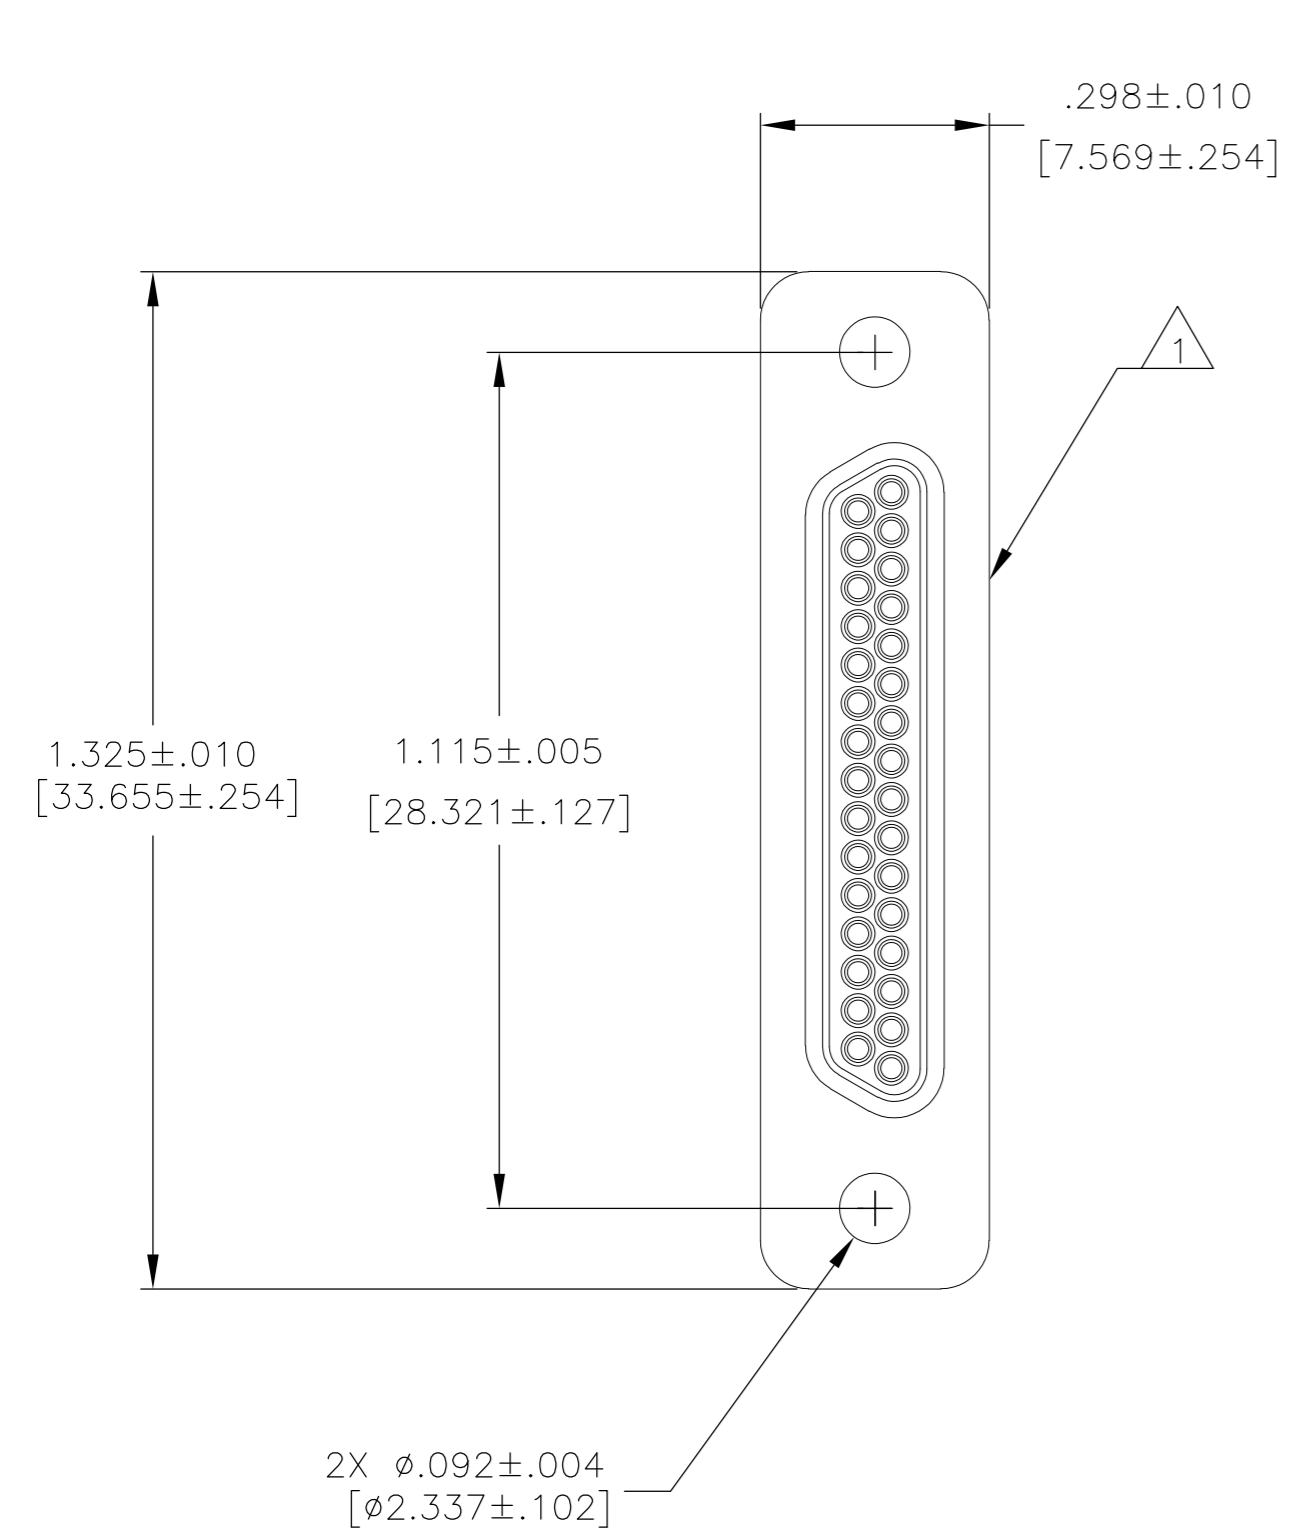

- 1 SHELL MATERIAL: 6061 T6 ALUMINUM, NICKEL PLATED PER SAE-AMS-2404 OR SAE-AMS-C-26704, .0015/.0019 THICK
 INSULATOR: GLASS FILLED THERMOPLASTIC
 CONTACTS: COPPER ALLOY, GOLD OVER NICKEL
- 2 MARK 1466709-1 AND YYWW (YY=YEAR, WW=WEEK) ON SURFACE SHOWN
- 3 THIS ASSEMBLY TO BE TERMINATED WITH 28AWG WHITE WIRE, AXON E28-07 WIRE, TE P/N 1467556-1
- 4 CONNECTOR REQUIREMENTS:
 CRIMP CONTACTS PER SF02-08 OR SF02-10
 POTTING PER SF02-01, CURE PER SF02-17
 TEST CONNECTOR PER SF03-10 TYPE B
 INSPECT PER SF03-03
- 5 POTTING LEVEL NOT TO EXTEND BEYOND SHELL PER SF02-05
- 6 ALL DIMENSIONS AND REQUIREMENTS ARE PER MIL-DTL-83513/3

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C SCHOLL	2 FEB 17	TE Connectivity	
DIMENSIONS: INCHES		CHK -	APVD -		
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± .01 3 PLC ± .005 4 PLC ± - ANGLES ± 2°		PRODUCT SPEC -		APPLICATION SPEC -	
MATERIAL SEE NOTES		FINISH SEE NOTES		WEIGHT 0	SIZE A2
CAGE CODE 98278		DRAWING NO 1466709-1		RESTRICTED TO -	
CUSTOMER DRAWING		SCALE 4:1		SHEET 1 of 1	
		REV A			

1466709-1