



Photoelectric Sensors  
**BOS 50K-PA-PR10-S4**  
Order Code: BOS01CR

**BALLUFF**

### Electrical data

Load capacitance max. at Ue	7 µF
No-load current I <sub>o</sub> max. at Ue	50 mA
Operating voltage U <sub>b</sub>	10...30 VDC
Protection class	II
Rated insulation voltage U <sub>i</sub>	250 V AC
Rated operating current I <sub>e</sub>	100 mA
Rated operating voltage U <sub>e</sub> DC	24 V
Ready delay t <sub>v</sub> max.	200 ms
Residual current I <sub>r</sub> max.	10 µA
Ripple max. (% of U <sub>e</sub> )	10 %
Switching frequency	400 Hz
Turn-off delay t <sub>off</sub> max.	1.25 ms
Turn-on delay t <sub>on</sub> max.	1.25 ms
Utilization category	DC -13
Voltage drop U <sub>d</sub> max. at I <sub>e</sub>	2.5 V

### Environmental conditions

Ambient temperature	-5...55 °C
EN 60068-2-27, Shock	Half-sinus, 30 gn, 11 ms, 3x6
EN 60068-2-6, Vibration	10...55 Hz, amplitude 0.5 mm, 3x30 min
Protection degree	IP67

### Functional safety

MTTF (40 °C)	617 a
--------------	-------

### Material

Housing material	PC
	ABS
Material sensing surface	Glass

### Mechanical data

Dimension	28.5 x 80.5 x 62 mm
Mounting	Screw M5

### Optical features

Ambient light max.	10000 Lux
Beam characteristic	Divergent
LED group per IEC 62471	Exempt Group
Light spot size	200 x 200 mm at 10 m
Light type	LED, red light
Polarizing filter	yes
Principle of optical operation	Retroreflective sensor
Switching function, optical	Light-on dark-on
Wave length	630 nm

### Output/Interface

Switching output	PNP normally open (NO) PNP NC Pins 4-2
------------------	---

### Range/Distance

Range	0...18 m
Rated operating distance S <sub>n</sub>	18 m Adjustable
Temperature drift max. (% of S <sub>r</sub> )	10 %

### Remarks

Order accessories separately.

The sensor is functional again after the overload has been eliminated.

For additional information, refer to user's guide.

Only for applications per NFPA 79 (machines with a supply voltage of maximum 600 V). Use an R/C (CYJV2) cable with suitable properties for attaching the device.


### Connector Drawings



## Wiring Diagrams



## Technical Drawings

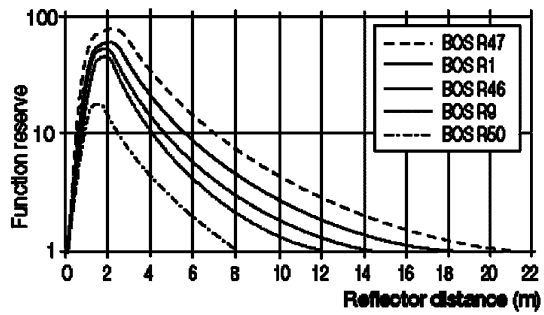

## Opto Symbols

