

## Basic features

Application	very good mechanical strength
Approval/Conformity	cULus EAC WEEE

## Electrical connection

Bending radius min., fixed cable	5 x D
Bending radius min., flexible cable	10 x D
Cable	PUR black, 3.10 m
Cable diameter D	5.10 mm ±0.20 mm
Conductor cross-section	0.34 mm <sup>2</sup>
Connection 1	M12x1-Female, angled, 5-pin, A-coded
Connection 2	M12x1-Male, straight, 4-pin, A-coded
Number of conductors	4
Protection jacket color	silver
System	Molded/Molded

## Electrical data

Operating voltage $U_b$	250 VDC / 250 VAC
Rated current (40 °C)	4.0 A

## Environmental conditions

Cable temperature UL max., fixed routing	80 °C
Cable temperature UL max., flexible routing	80 °C
Cable temperature, fixed routing	-50...90 °C
Cable temperature, flexible routing	-25...90 °C
Protection degree	IP65/IP65

## Material

Cable jacket, material	PUR
Jacket material	V2A
Material contact carrier	PUR, special/PUR, special
Material contacts	Bronze/Brass
Material cover nut	Brass PTFE coated/Brass PTFE coated
Material grip	PUR, special/PUR, special

## Mechanical data

Cable jacket, color	black
Cable length L	3.10 m
Tightening torque pigtail	0.6 Nm/0.6 Nm


## Output/Interface

Switching output	Complementary
------------------	---------------

Remarks

Cable construction acc. to UL-AWM Style 20549  
Halogen-free per DIN VDE 0472 Part 815  
Flame resistance per UL FT2  
Enclosure rating per IEC 60529, only in screwed state with the associated mating piece.

Connector Drawings

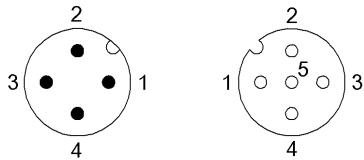

- |              |              |
|--------------|--------------|
| II           | I            |
| PIN 1: brown | PIN 1: brown |
| PIN 2: white | PIN 2: white |
| PIN 3: blue  | PIN 3: blue  |
| PIN 4: black | PIN 4: black |
|              | PIN 5: n.c.  |

Wiring Diagrams

