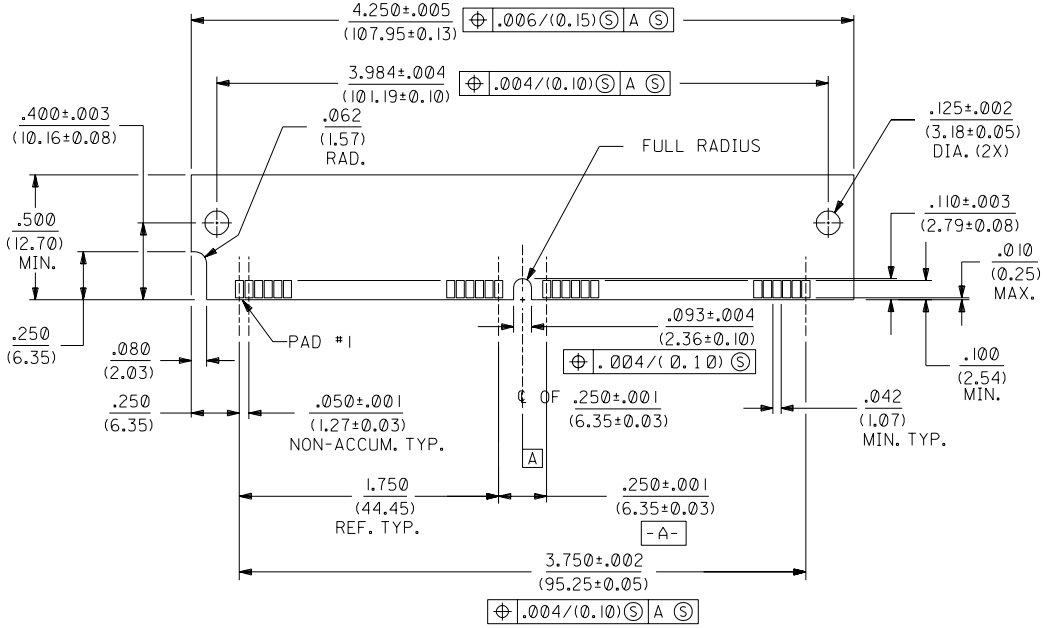

"SIMM" P.C. BOARD LAYOUT

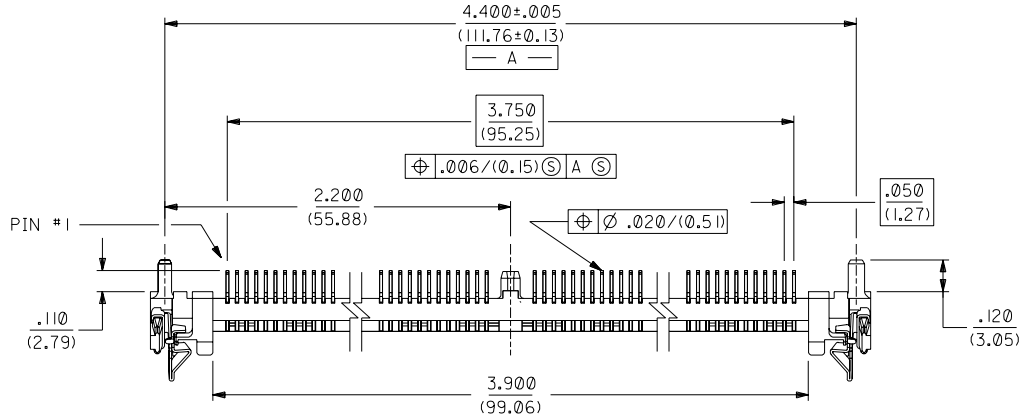

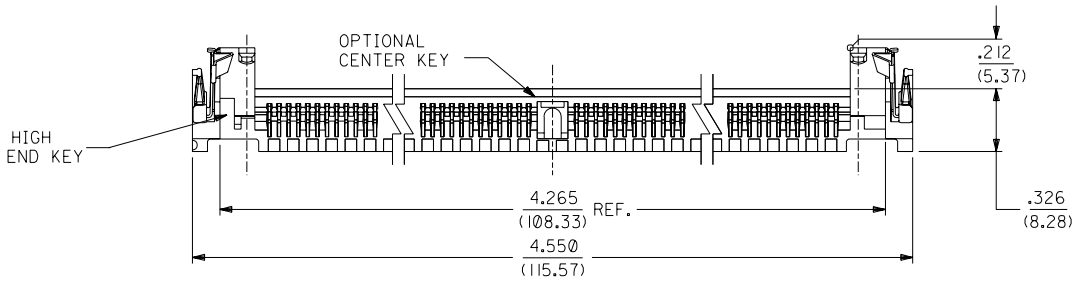

NOTES:
1. CARD SLOT ACCEPTS P.C. BOARDS .050 +.004/-.003 (1.27 +0.10/-0.08) THICK, MEASURED OVER CONTACT PADS.
2. PRODUCT SPEC PS-78954 APPLIES.
3. LOCATION OF LOWER CORNER OF MODULE BOARD.
4. CENTER PEG IS AN INTERFERENCE FIT TO RECOMMENDED P.C. BOARD HOLE.

MATERIALS:
HOUSING: LCP, GLASS FILLED, 94V-0. COLOR: BLUE.
LATCH: STAINLESS STEEL.
TERMINAL: PHOSPHOR BRONZE, POST PLATED
30μIN./(.76μm) MIN. GOLD IN CONTACT AREA AND 150μIN./(3.81μm) MIN. TIN IN TAIL AREA OVER 75μIN./(1.91μm) MIN. NICKEL OVERALL.

*THE PRIMARY SHIPPING CARTON WILL BE LABELED "COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC". CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH LEAD.

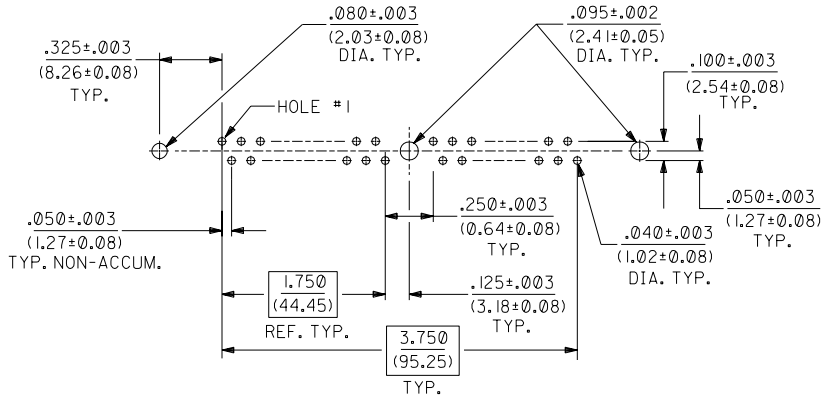

RECOMMENDED SOCKET
P.C. BOARD HOLE PATTERN

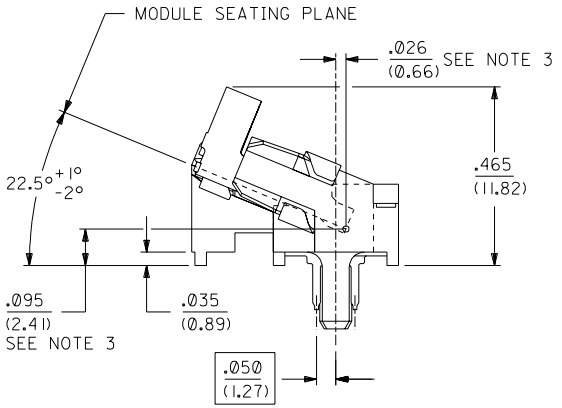

END VIEW
SCALE 4:1

LTR.	REVISIONS
K	LEAD FREE UCP2004-1582 RWHITE 04/02/25
J	REVISED PER ECN* U51394 GMY 7-24-95
I	REVISED PEG LENGTH PER ECR*U30751 MJS 6-8-93
H	REMOVED TRACKING TOES PER ECN *U20914 PDB 06-17-92
G	REVISED NOTES PER ECN *U11964 PDB 10-03-91
F	REVISED SALES MASTER PER ECN *U11871 PDB 09-10-91
E	.150 WAS .120 PER ECN *U10303 PDB 01-22-91
D	REVISED PER ECN *U00846 PDB 10-29-90
C	REVISED PER ECR *U00620 PDB 08-24-90
B	REVISED PER ECR *U00635 PDB 08-20-90
A	RELEASE TO MFG. PER ERO *30233 PDB 08-07-90

MFG. SH. REV.

78964

DIMENSIONS SHOWN (METRIC) INCH
UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± 1/2°

	INCH	METRIC
3 PLACE	± .010	---
2 PLACE	± .014	± 0.25
1 PLACE	---	± 0.35

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DRWG. BY PDB | CHK'D. BY | APP'D. BY | SCALE 2:1

▽ = 0 ▼ = 0 REVISE ONLY ON CAD SYSTEM

TITLE: SALES ASSEMBLY
22.5° METAL LATCH CENTER KEY
SINGLE ROW SIMM SOCKET

molex MOLEX INCORPORATED LISLE,ILL. 60532 U.S.A.

SHEET NO. 1 OF 1 | DATE 08/07/90

PART NO. 15-82-0677 | DRWG. NO. SDA-78964-7252

FILE NAME S7896420 DGN

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

DIV. DA | SIZE C